

Elmer/Ice advanced Workshop

29-31 October 2018

Basal Conditions (Friction laws & Hydrology)

Olivier GAGLIARDINI

IGE - Grenoble - France

LabEx OSUG@2020



Basal Conditions

✓ The Physics

- Sliding at the base of glacier
- The role of basal water
- Different drainage systems

✓ Friction laws and Hydrology


- Linear friction law
- Weertman type friction law
- Water-pressure dependant friction laws
- Double continuum hydrology model
- GlaDS model

✓ Implementation in Elmer/Ice

- Various friction laws


✓ Examples

Coupling water / friction and more...

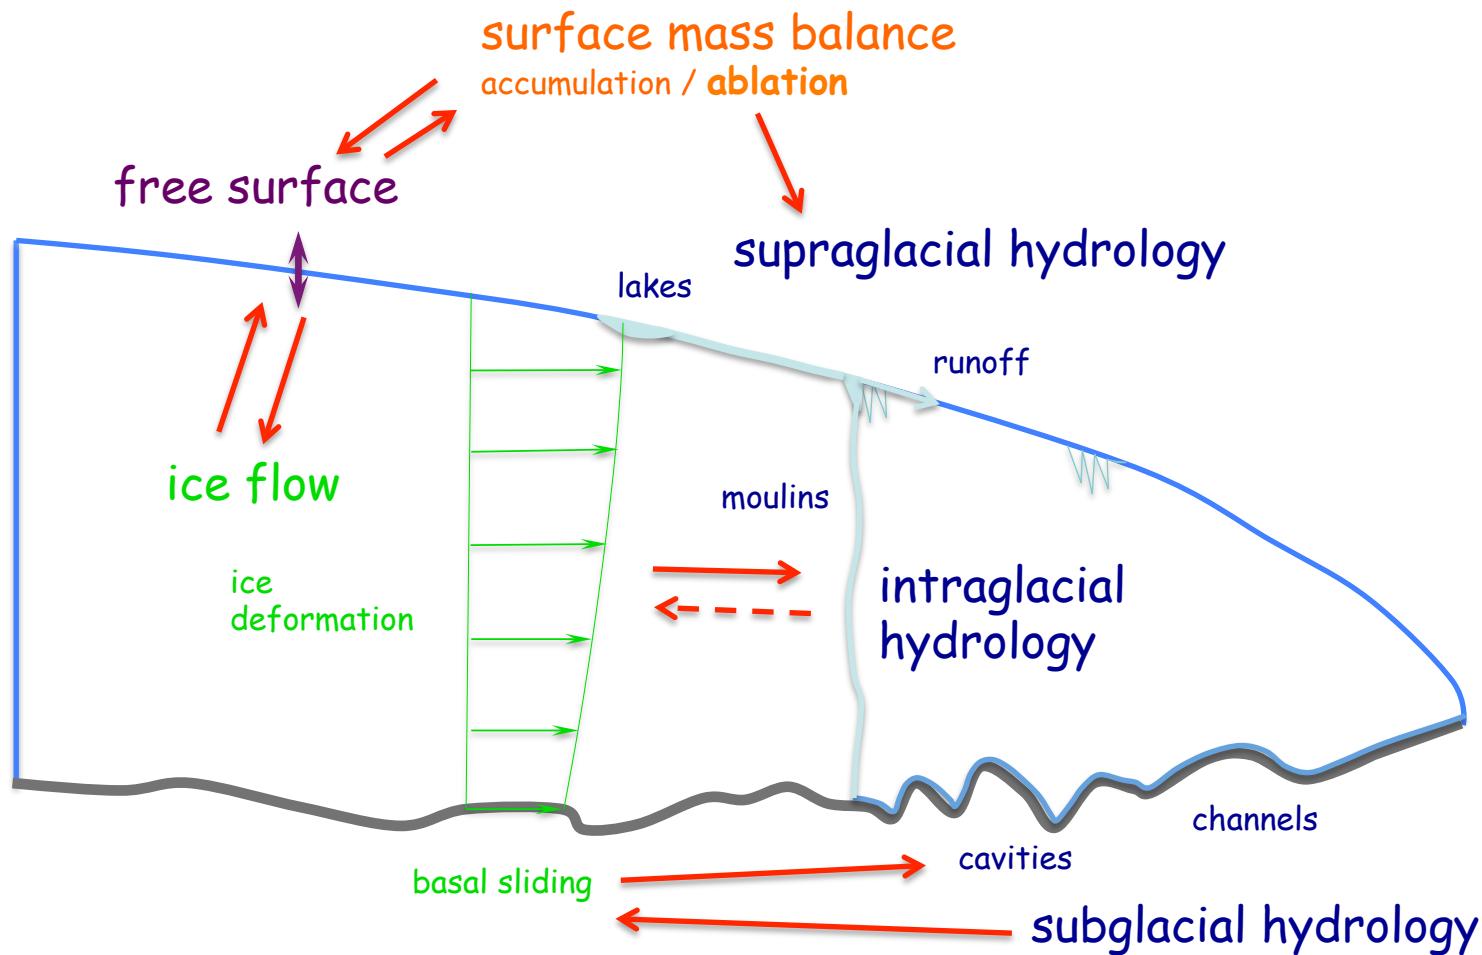

Relationship between velocity and water


Velocity and discharge measurements on Bench glacier
(Alaska)

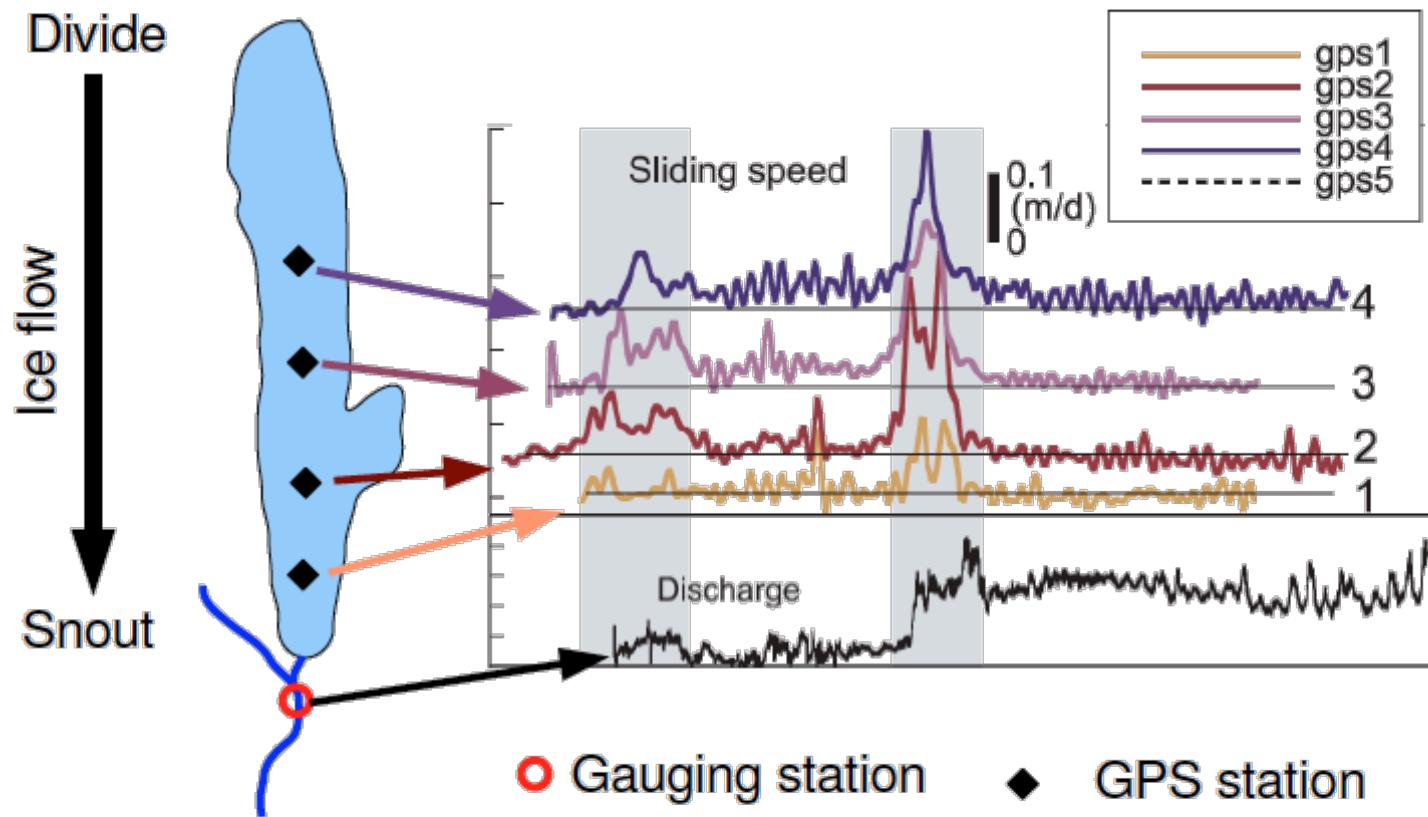


@deFleurian

Figure adapted from [Anderson et al., 2004]


Scale of interest

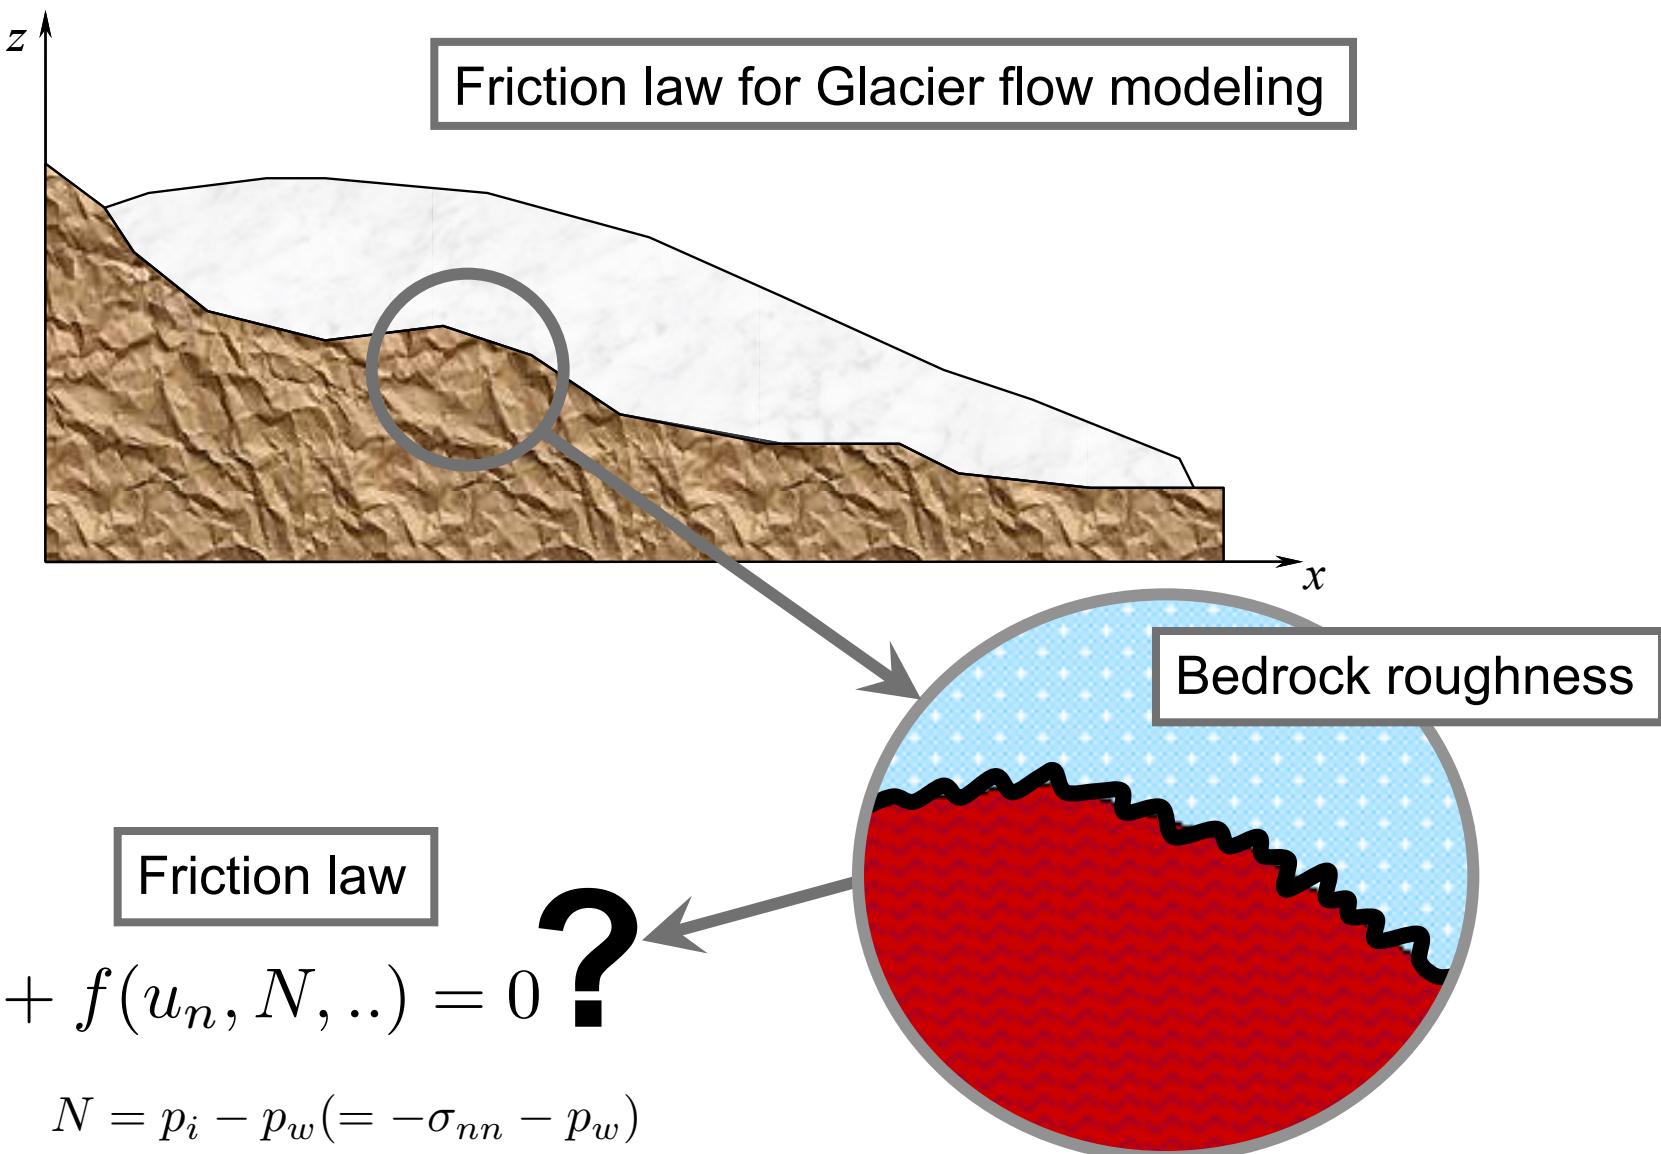

Concept of friction law

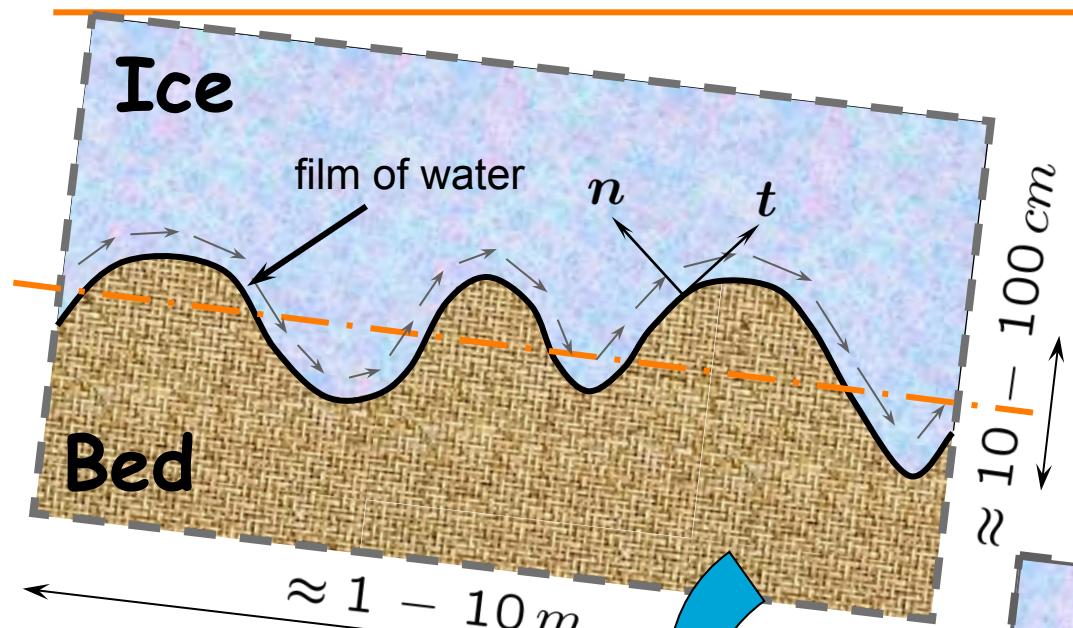

$$u_t(x)$$
$$u_n = 0$$
$$\sigma_{nt} = 0$$

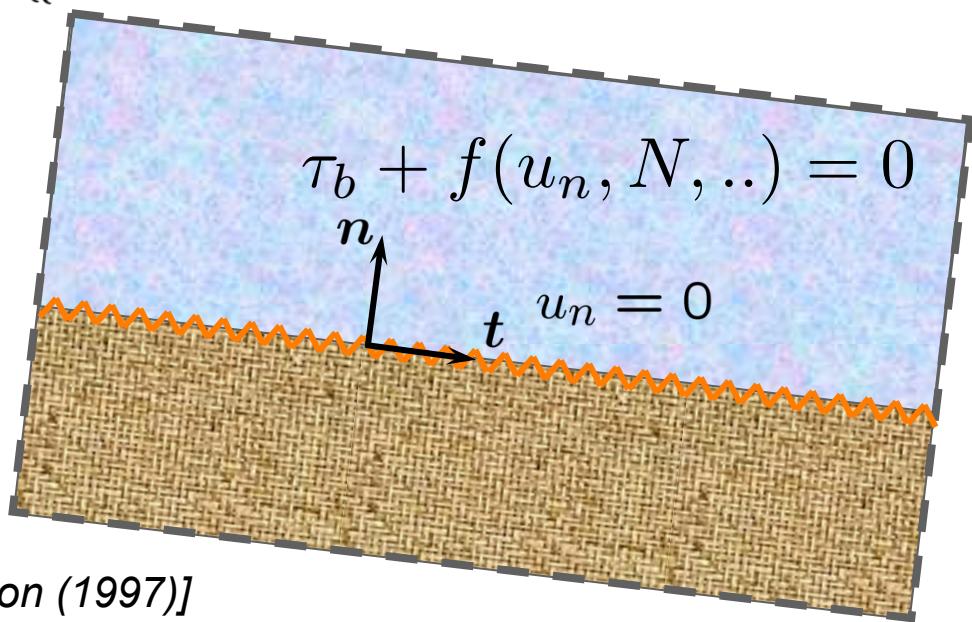


[Weertman (1957), Fowler (1981), Gudmundsson (1997)]

How water enhances glacier sliding

If water pressure and/or velocity increase

Water network under pressure

p_w

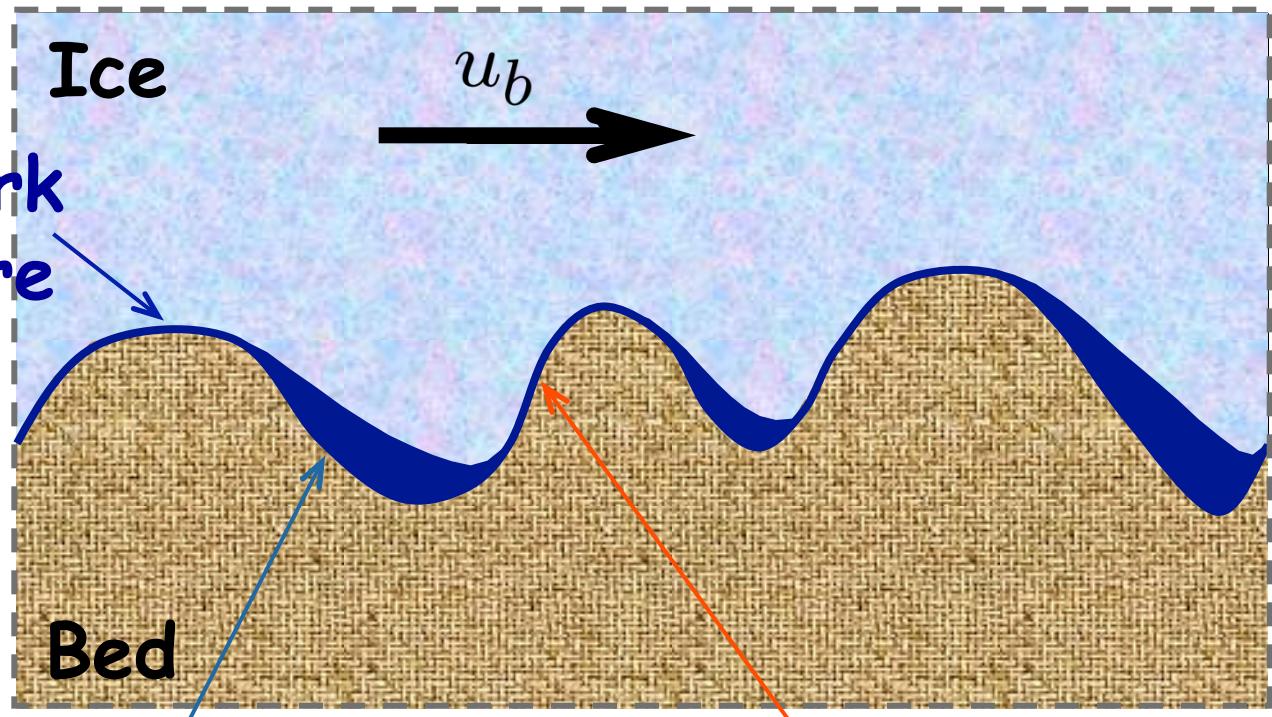


Low normal stress High normal stress




How does it affect the form of the sliding law ?

Water at the base of glaciers

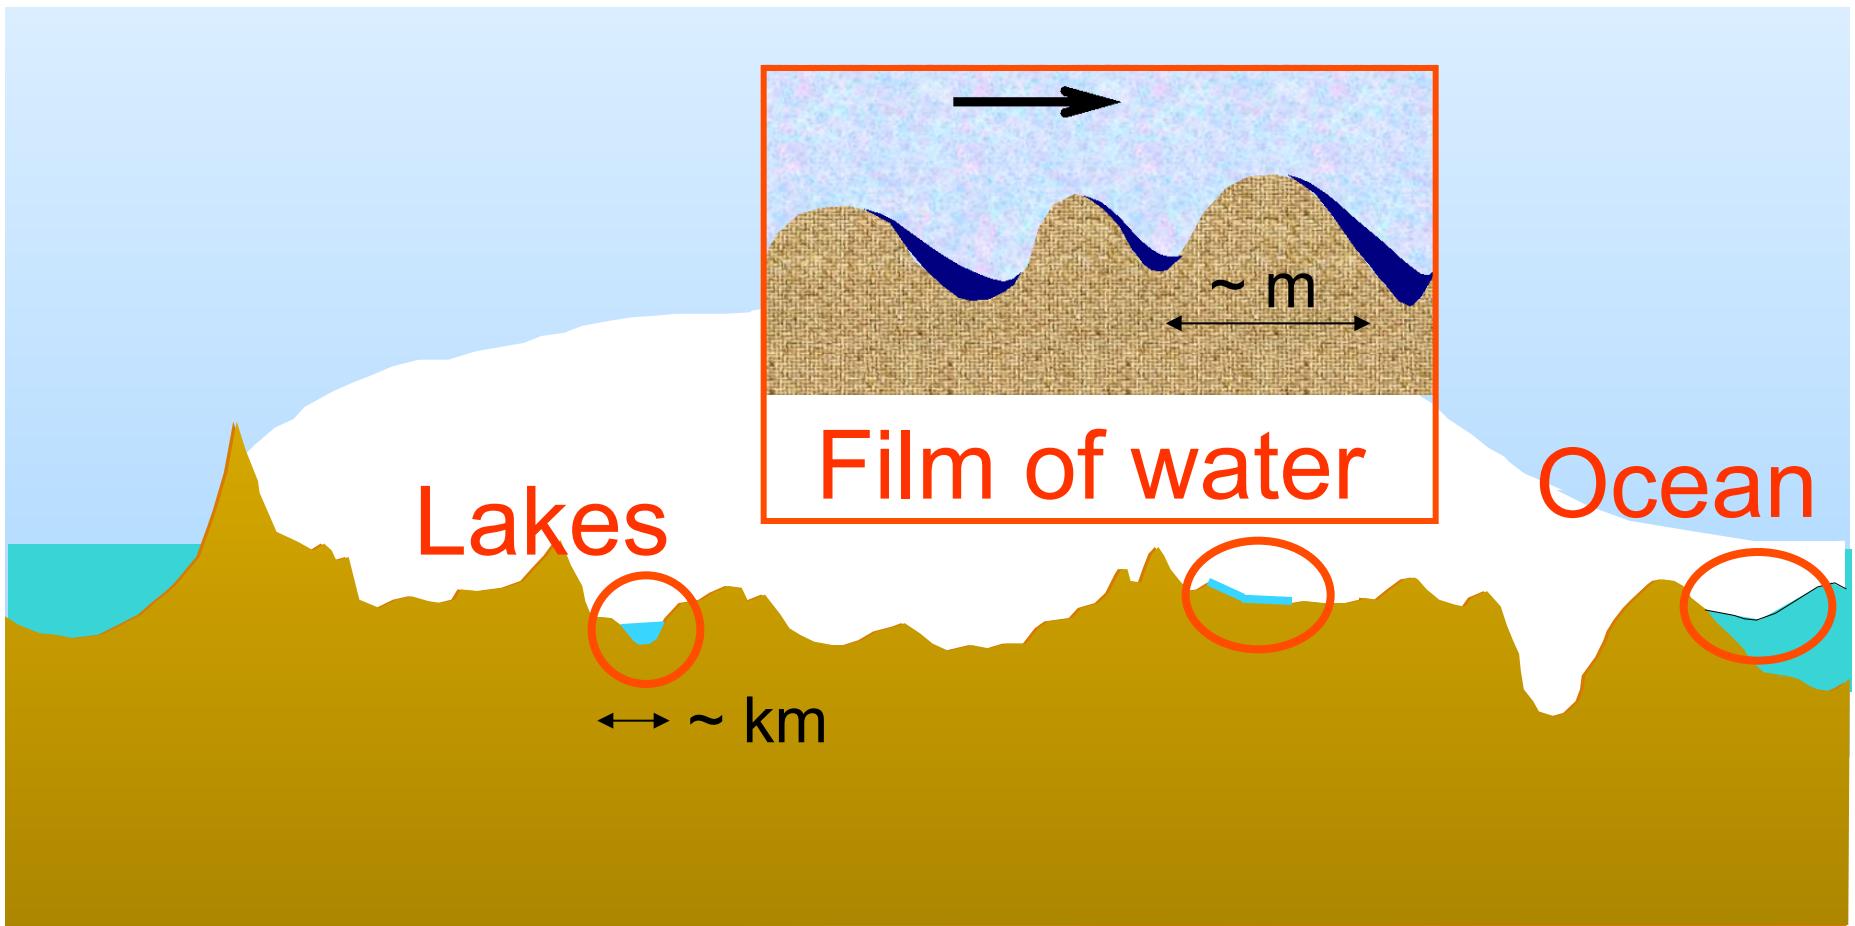

Effective pressure: $N = -\sigma_{nn} - p_w$

Why is there (liquid) water?

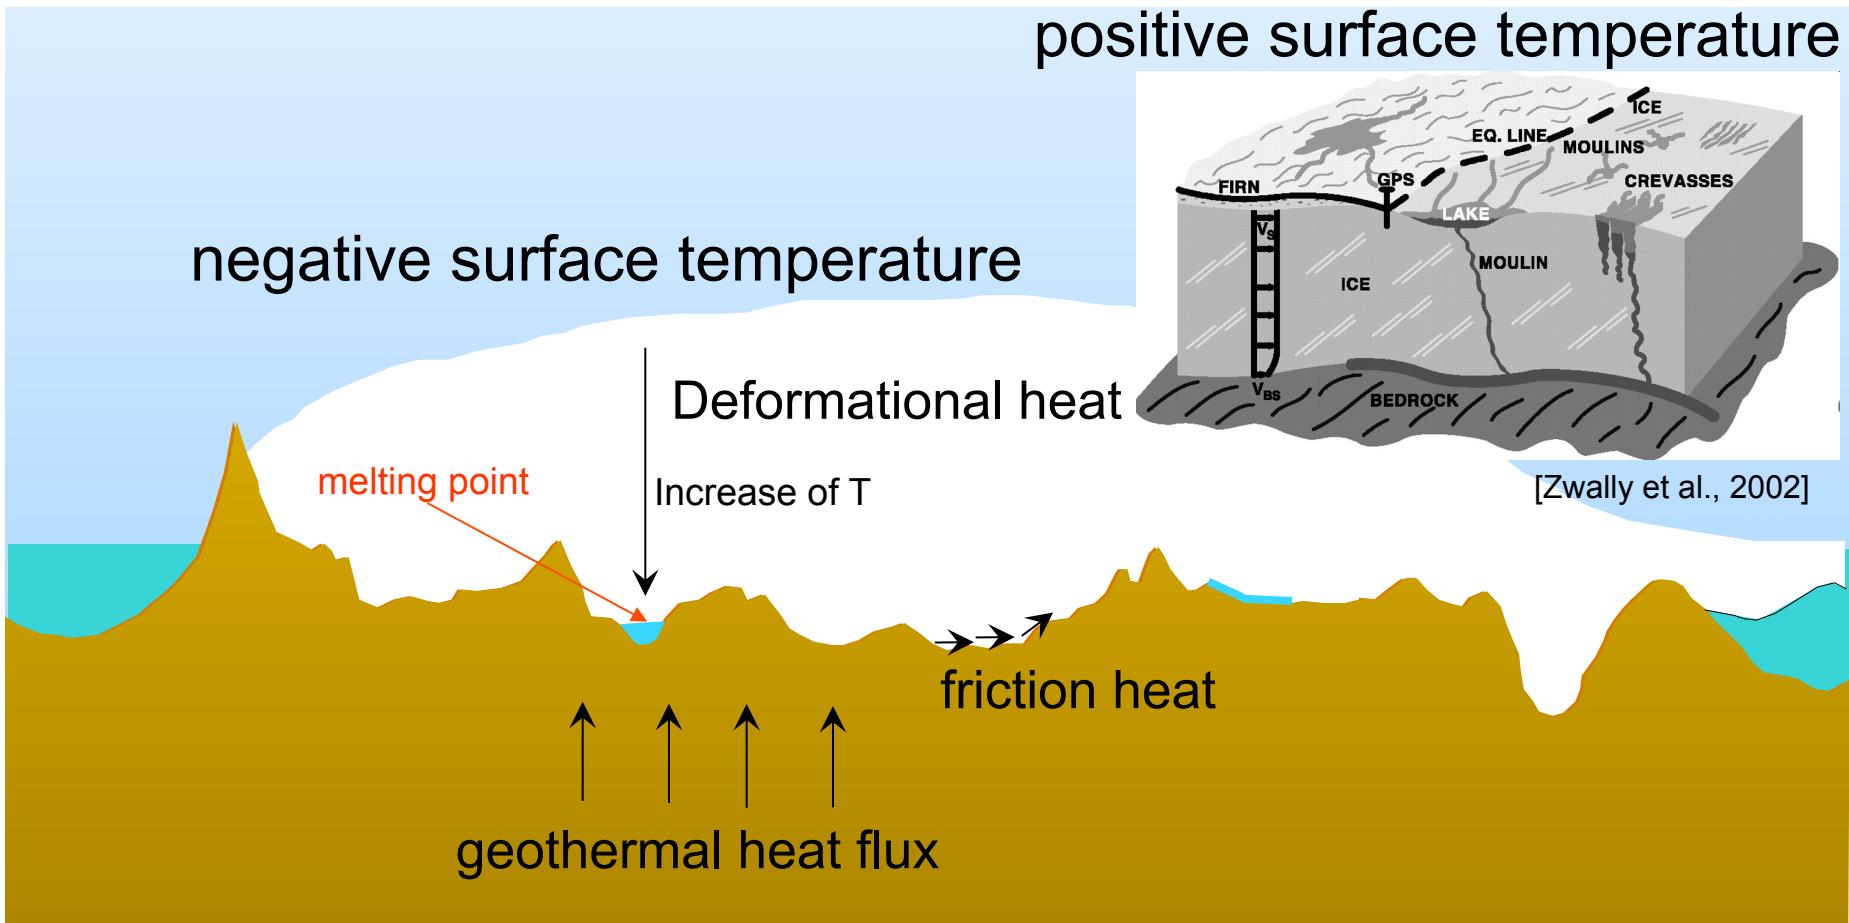

Two types of drainage systems

- ▶ Inefficient drainage systems

low conductivities
high water pressure
distributed systems

}

@deFleurian



Two types of drainage systems

- ▶ Inefficient drainage systems

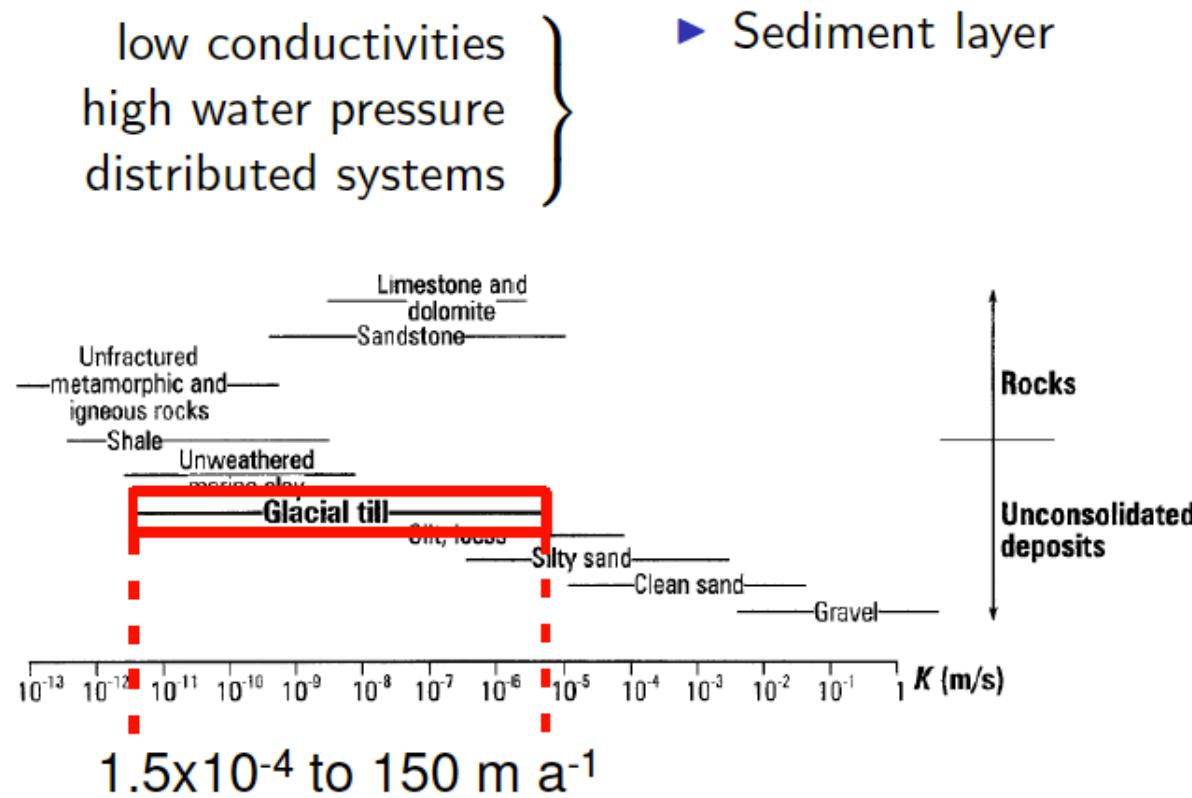


Figure from [Freeze and Cherry, 1979]

@deFleurian

Two types of drainage systems

► Inefficient drainage systems

low conductivities
high water pressure
distributed systems

- Sediment layer
- Linked cavities

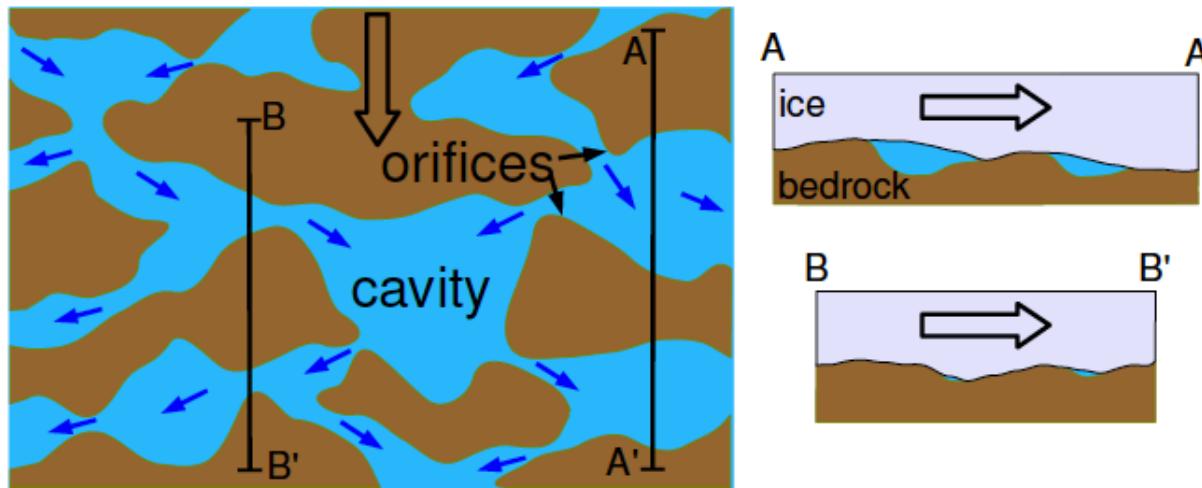


Figure from [Kamb, 1987]

@deFleurian

Two types of drainage systems

► Inefficient drainage systems

- low conductivities
high water pressure
distributed systems } ► Sediment layer
 ► Linked cavities
 ► Water film

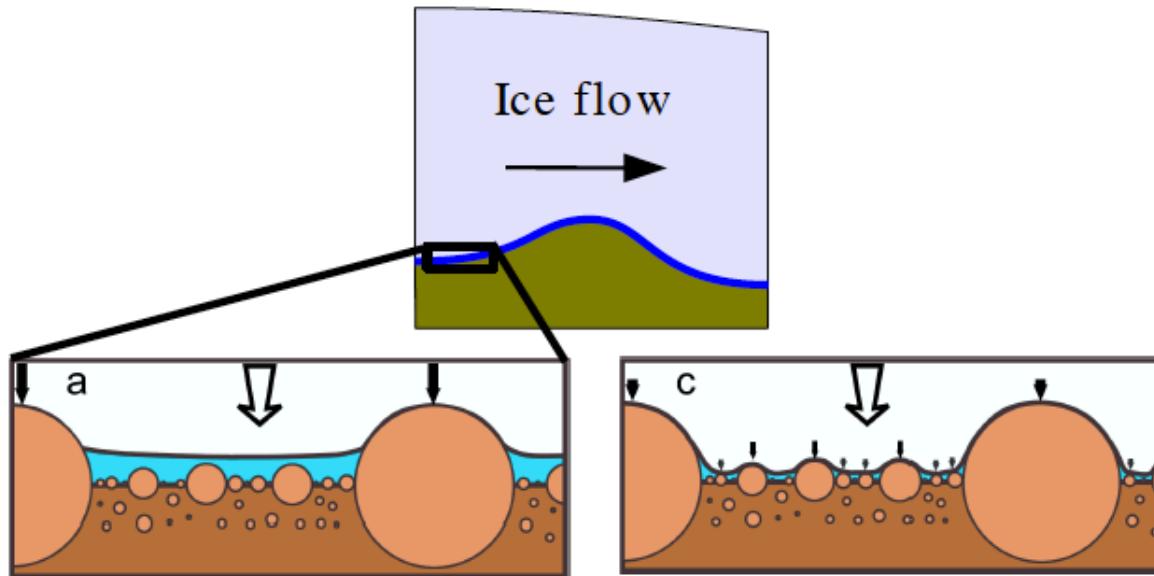



Figure from [Creyts and Schoof, 2009]

@deFleurian

Two types of drainage systems

- ▶ Inefficient drainage systems
- ▶ Efficient drainage systems

high conductivities
low water pressure
localized systems } ▶ Channels

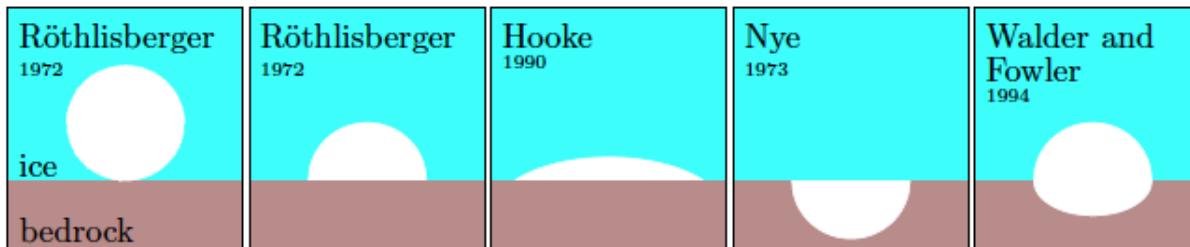


@deFleurian

Two types of drainage systems

- ▶ Inefficient drainage systems
- ▶ Efficient drainage systems

high conductivities
low water pressure
localized systems } ▶ Channels

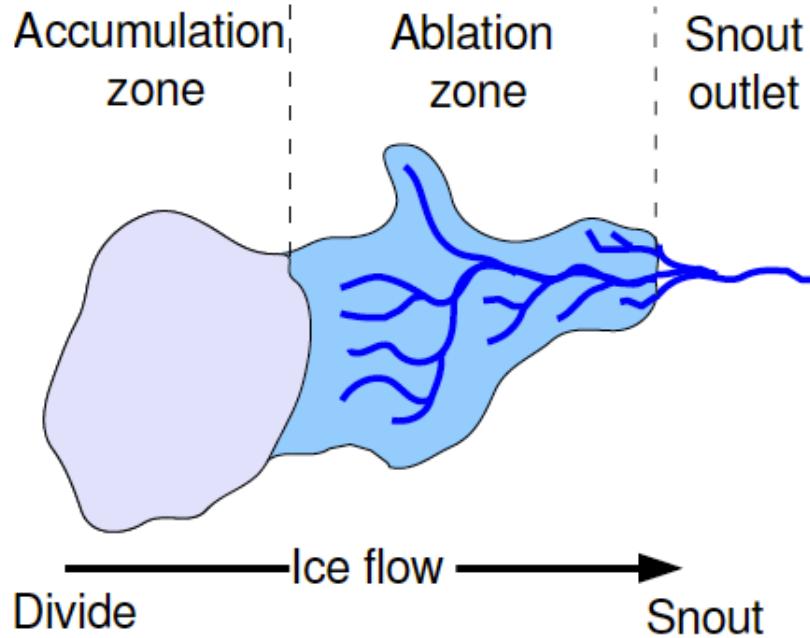

@deFleurian

Two tightly-related systems

The link between inefficient and efficient systems is observable in the field

- ▶ As a spatial variation

Water load observed across Breidamerkrujökull during Autumn Winter transition


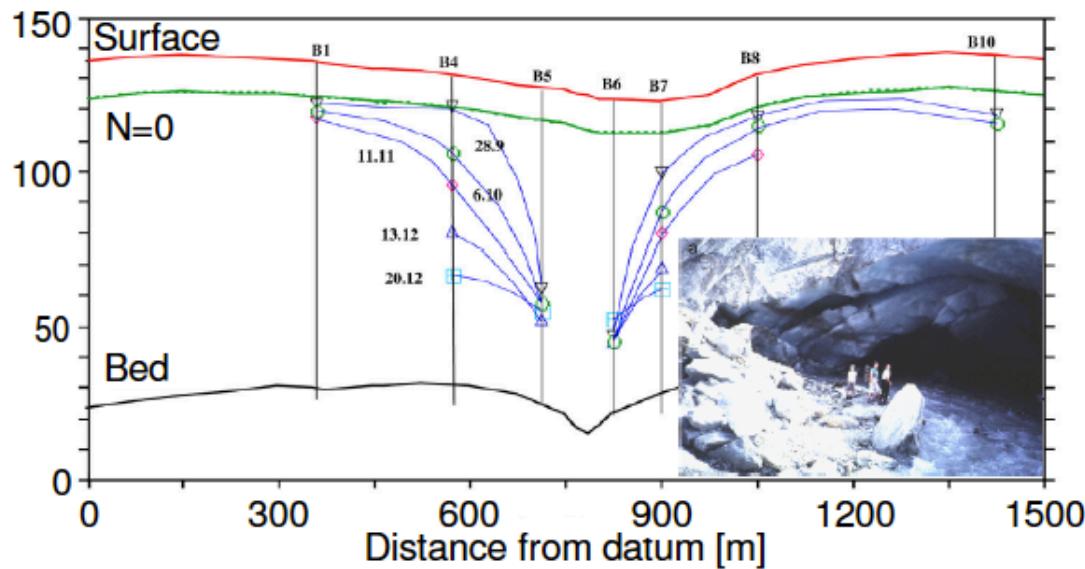


Figure adapted from [Boulton et al., 2007]

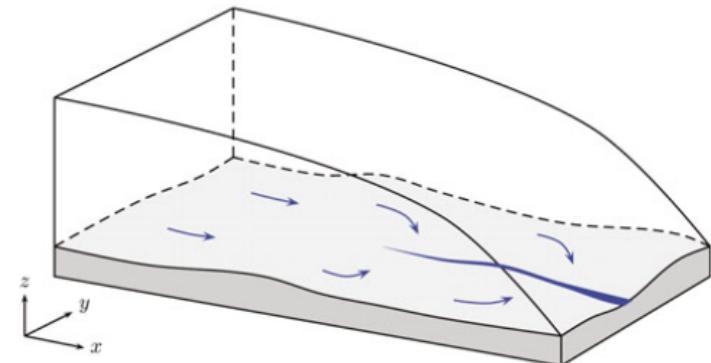

From [Hewitt, 2011]

@deFleurian

Two tightly-related systems

The link between inefficient and efficient systems is observable in the field

- ▶ As a spatial variation
- ▶ As a temporal evolution

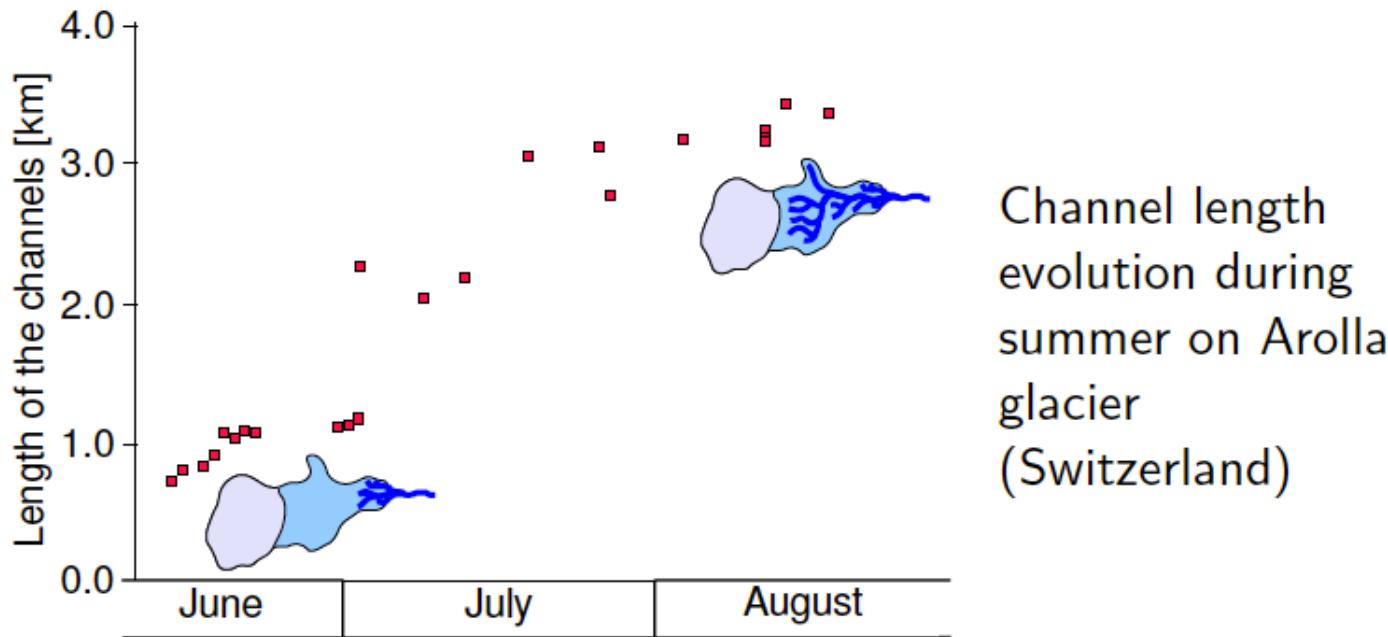


Figure adapted from [Nienow et al., 1998]

@deFleurian

Basal Conditions

✓ The Physics

- Sliding at the base of glacier
- The role of basal water
- Different drainage systems

✓ Friction laws and Hydrology

- Linear friction law
- Weertman type friction law
- Water-pressure dependant friction laws
- Double continuum hydrology model
- GlaDS model

✓ Implementation in Elmer/Ice

- Various friction laws

✓ Examples

Friction laws

A friction law is a relation that gives the basal shear stress as a function of the sliding velocity and other variables (effective pressure, ...):

$$\begin{cases} \tau_b = t \cdot \sigma \cdot n \\ u_b = u \cdot t \\ \sigma_{nn} = n \cdot \sigma \cdot n \\ N = -\sigma_{nn} - p_w \end{cases}$$

$$\tau_b + f(u_b, N, \dots) = 0$$

Linear friction laws:

$$\tau_b + \beta u_b = 0 \quad \beta \text{ Drag factor or friction parameter}$$

$$u_b + C \tau_b = 0 \quad C \text{ Sliding parameter}$$

Weertman type friction law (non-linear):

$$\tau_b + (u_b/A_s)^{1/n} = 0 \quad A_s \text{ Sliding parameter}$$
$$n \text{ Glen's flow law exponent}$$

Friction laws – water pressure dependant

The friction should depend on the water pressure $N = -\sigma_{nn} - p_w$

Raymond and Harrison, 1987, Bindschadler (1983), Budd et al. (1984) :

$$u_b + k\tau_b^p N^{-q} = 0 \quad \text{e.g. } p = n = 3, q = 1$$

Iken's bound, 1981:


$$\tau_b/N < m_{\max} \quad m_{\max} \text{ the maximum up-slope of the bed}$$

not fulfilled by the previous law


Illustration of Iken's bound

$$\text{Iken's bound : } \frac{\tau_b}{N} \leq m_{max}$$

[Iken (1981), Fowler (1986), Schoof (2005)]

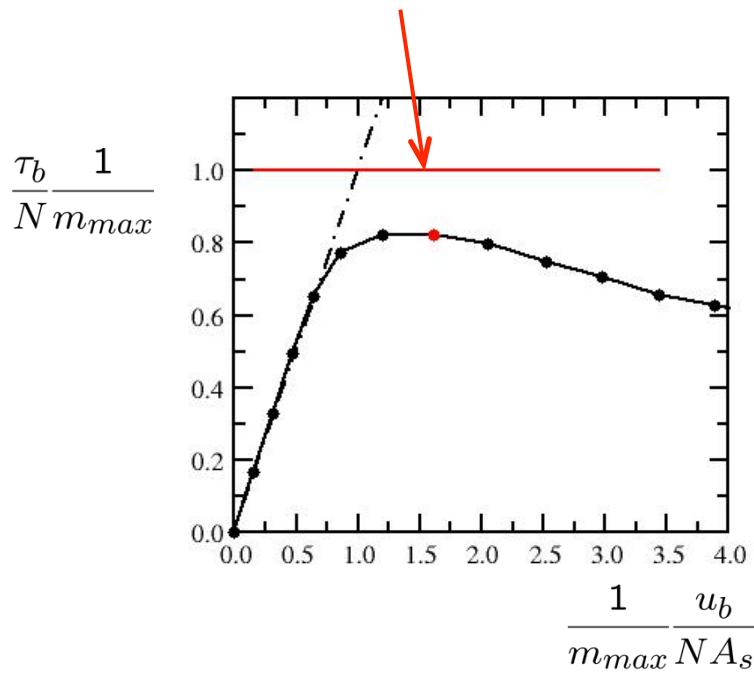

[Gagliardini et al., 2007]

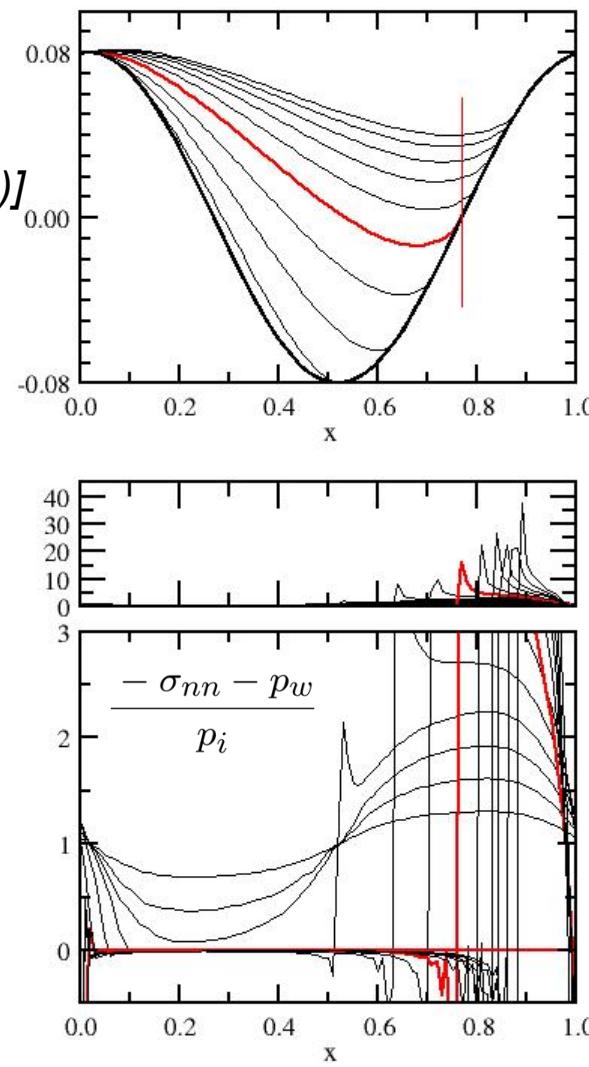

Coulomb-type friction law

Schoof (2005), Gagliardini et al., 2007:

$$\frac{\tau_b}{N} + C \left(\frac{\chi}{1 + \alpha \chi^m} \right)^{1/n} = 0$$

where


$$\begin{cases} \chi = \frac{u_b}{C^n N^n A_s} \\ \alpha = \frac{(m-1)^{m-1}}{m^m} \end{cases}$$

Fulfils the Iken's bound: $0 < \frac{\tau_b}{N} \leq C \leq m_{max}$

3 parameters:

$$\begin{cases} A_s & [m MPa^{-n} a^{-1}] \\ C \leq m_{max} & \text{Sliding parameter in absence of cavitation} \\ m \geq 1 & \text{Maximum value of } \tau_b / N \\ & \text{Post-peak exponent} \end{cases}$$

Coulomb-type friction law

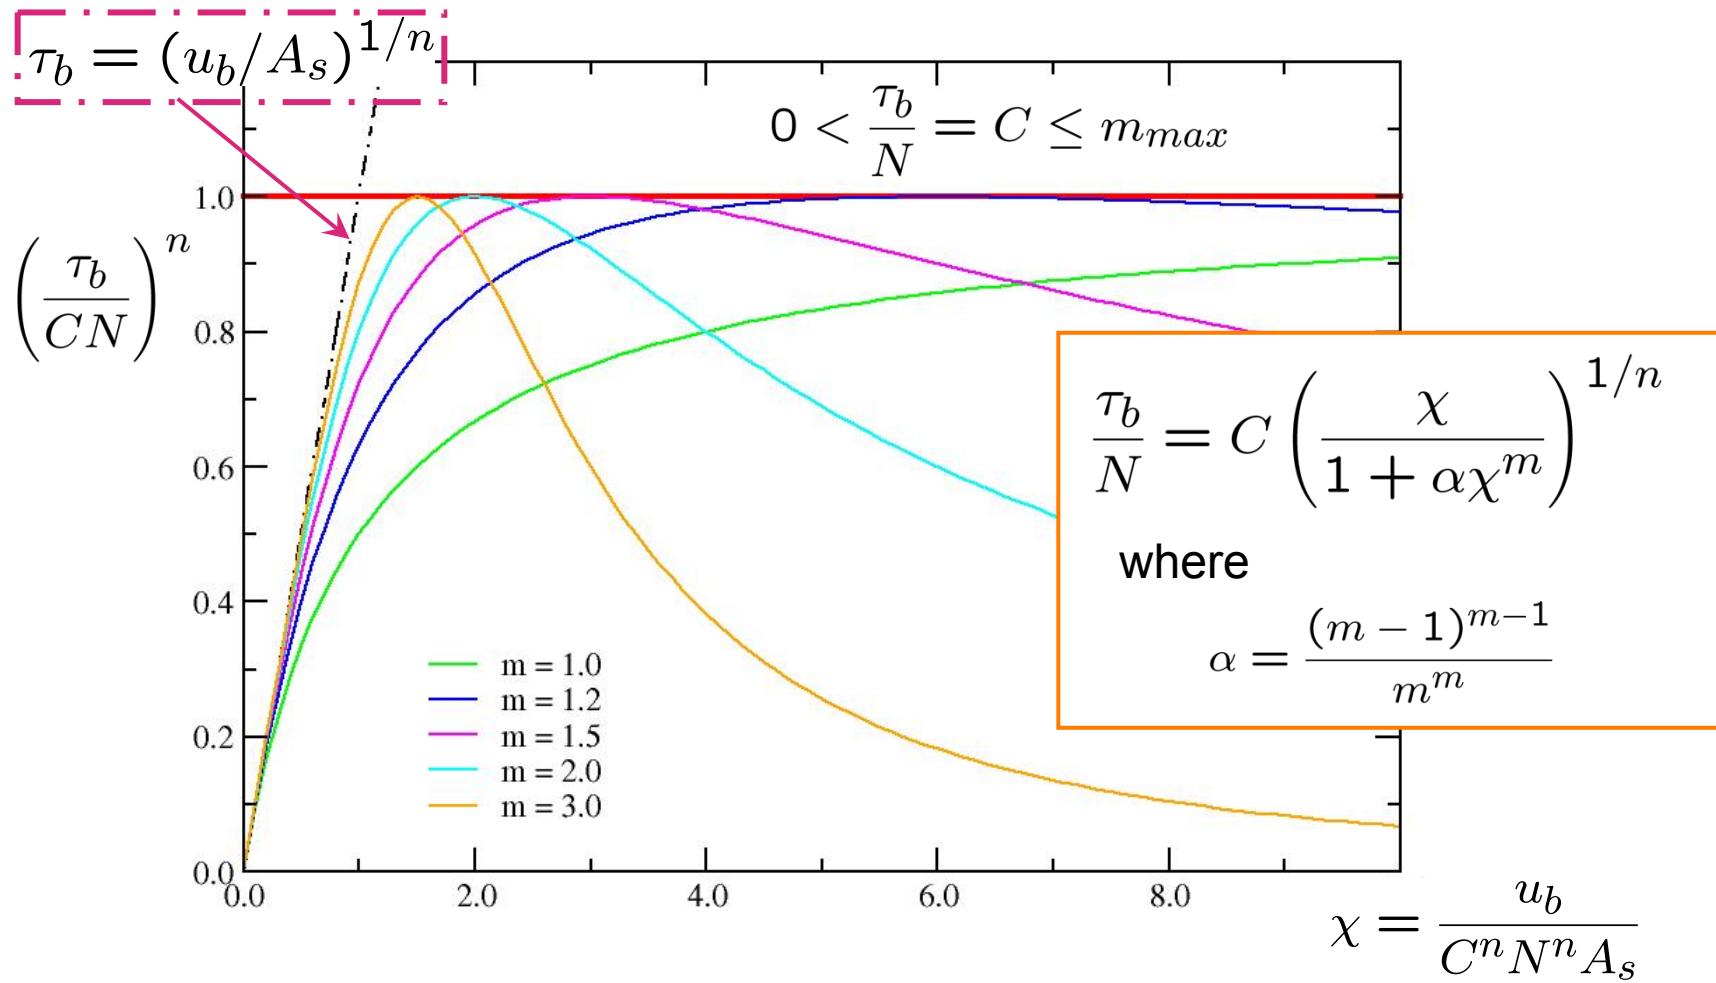

[Schoof (2005), Gagliardini et al., 2007]

Tsai Coulomb law

$$\tau_b + \min((u_b/A_s)^{1/n}; fN) = 0 \quad [Tsai \text{ et al., 2015}]$$

Fulfils the Iken's bound: $0 < \frac{\tau_b}{N} \leq f$

2 parameters:

$$\begin{cases} A_s & [mMPa^{-n}a^{-1}] \\ f & \text{Sliding parameter in absence of cavitation} \\ & \text{friction coefficient} \end{cases}$$

Comparison



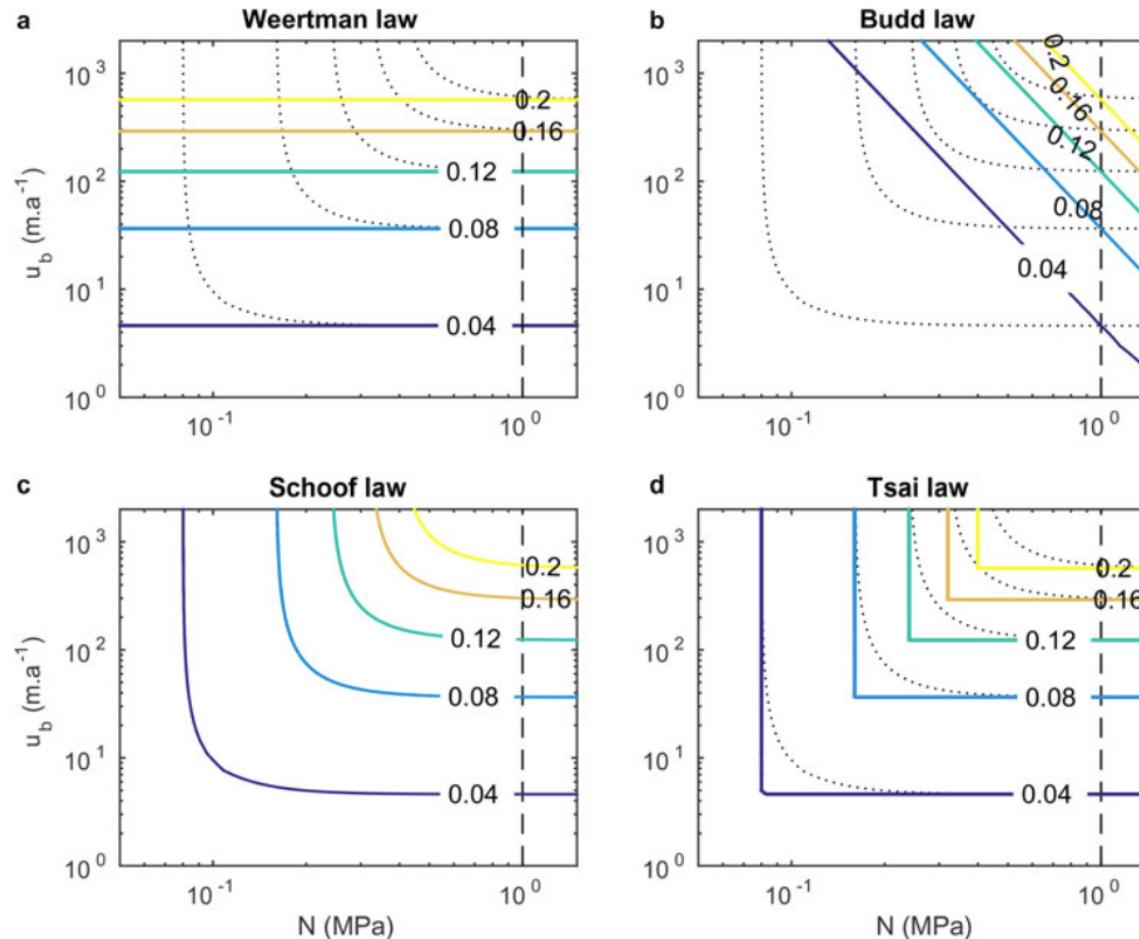


Fig. 1. Iso-values of τ_b ranging from 0.04 to 0.2 MPa given in the basal velocity-effective pressure log-log plane with: (a) Weertman, (b) Budd, (c) Schoof and (d) Tsai laws (Eqns (1)–(4)), for $m = 1/3$, $q = 1$, $C_W = C_B = C_S = 7.624 \times 10^6$ S.I. and $f = C_{\max} = 0.5$. Dotted black lines reported on each plot are the iso-values of τ_b given with the Schoof law. The vertical black dotted line corresponds to $N = 1$ MPa.

[Brondex et al., 2017]

Influence of Friction law on GL

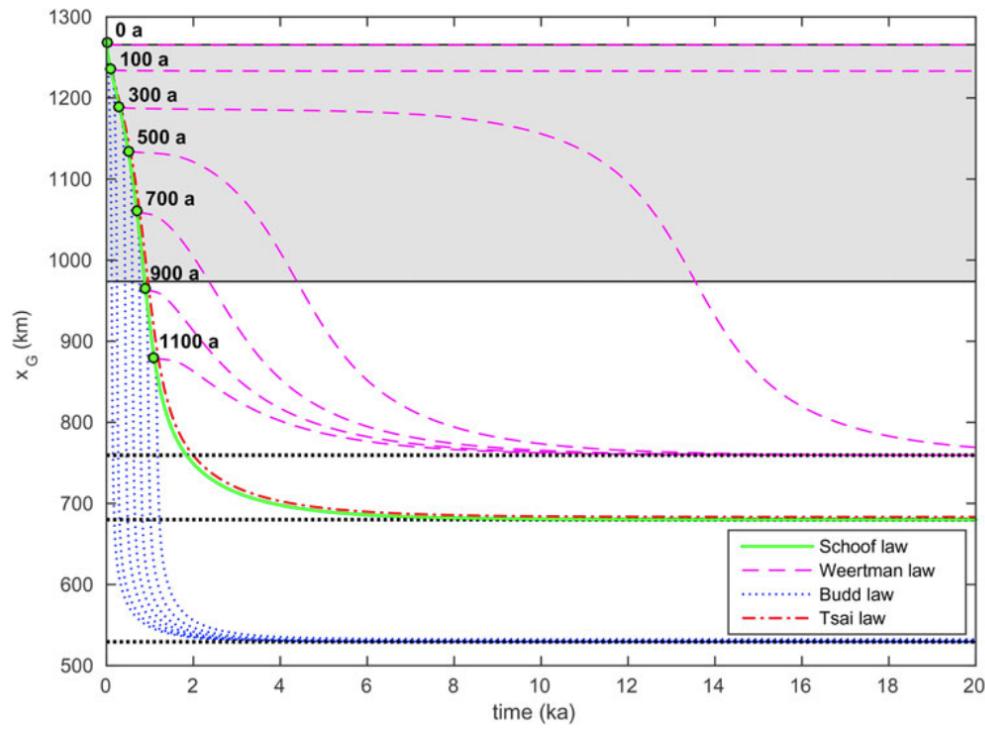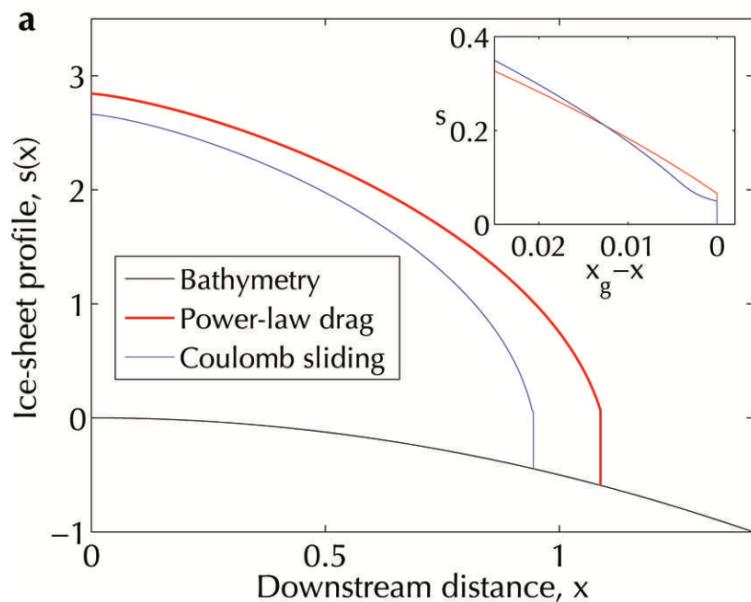

Basal Conditions

✓ The Physics

- Sliding at the base of glacier
- The role of basal water
- Different drainage systems

✓ Friction laws and Hydrology

- Linear friction law
- Weertman type friction law
- Water-pressure dependant friction laws
- Double continuum hydrology model
- GlaDS model

✓ Implementation in Elmer/Ice

- Various friction laws

✓ Examples

Two approaches in Elmer/Ice

Double continuum approach

- Developed and implemented by Basile de Fleurian
- in the distribution
- <http://elmerice.elmerfem.org/wiki/doku.php?id=solvers:hydrologydc>

Cavity sheet and discrete channels

- Model developed by Mauro Werder (Werder et al., 2013)
- Implemented in Elmer by O. Gagliardini
- In the distribution
- <http://elmerice.elmerfem.org/wiki/doku.php?id=solvers:glads>



The double continuum approach

Karstified hydrology methods developed while facing difficulties to model conduit drainage [Teutsch and Sauter, 1991]


2 systems
≠ characteristics

Similar media
≠ conductivities

Vertically
integrated

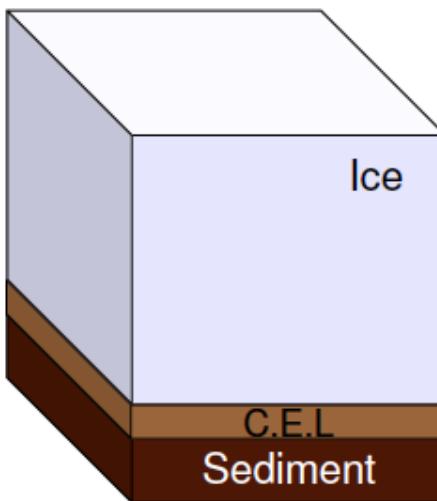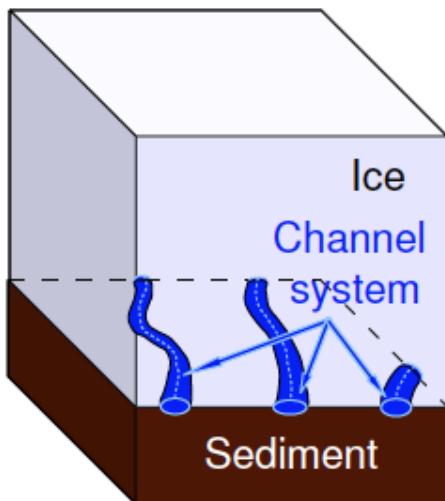

C.E.L : Channel
Equivalent
Layer

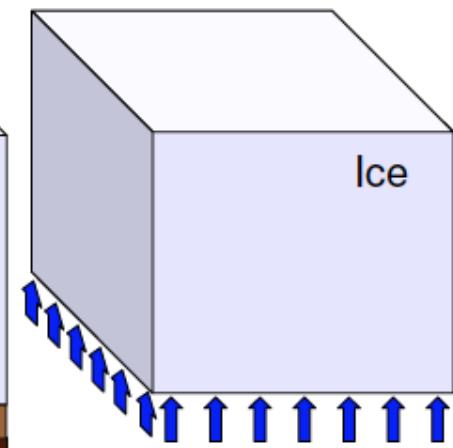

Water pressure
applied as a
boundary condition

@deFleurian

Computation of the water load

Vertically-integrated computation of the water load h_w

$$\operatorname{div} [\mathbf{T} \operatorname{grad} h_w] = S \frac{\partial h_w}{\partial t} + qe$$



Relies on the transmittivity \mathbf{T} and storage coefficient S of the aquifer

$$\mathbf{T} = \mathbf{K}e; S = \rho_w g e \omega \left[\beta_w + \frac{\alpha}{\omega} \right]$$


ρ_w	Water density	q	Sink/Source term
e	Layer thickness	ω	porosity
\mathbf{K}	Sediment conductivity	α	Porous media
β_w	Water compressibility		compressibility

@deFleurian


3 states of the Channel Equivalent Layer

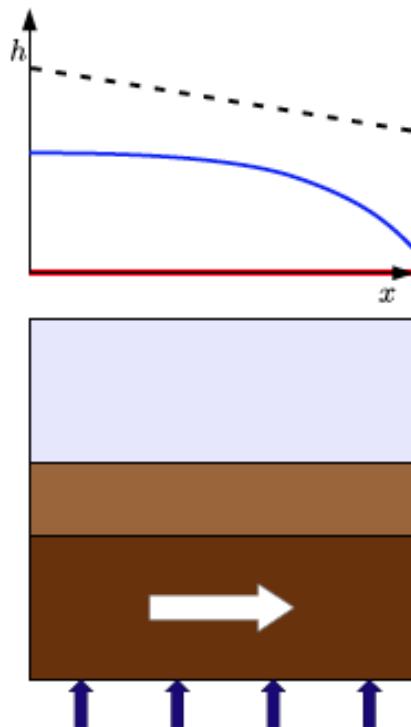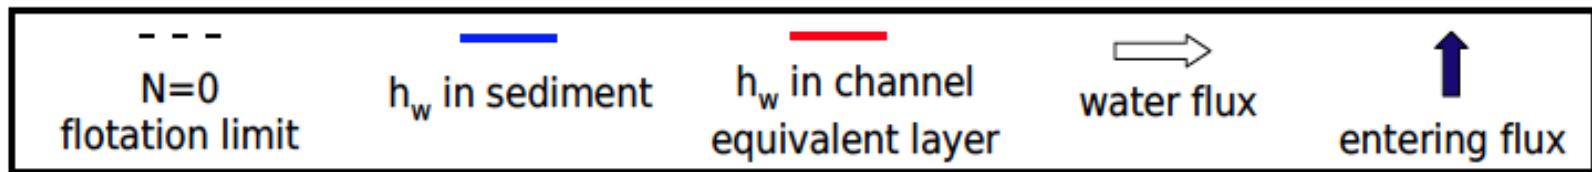

closed CEL

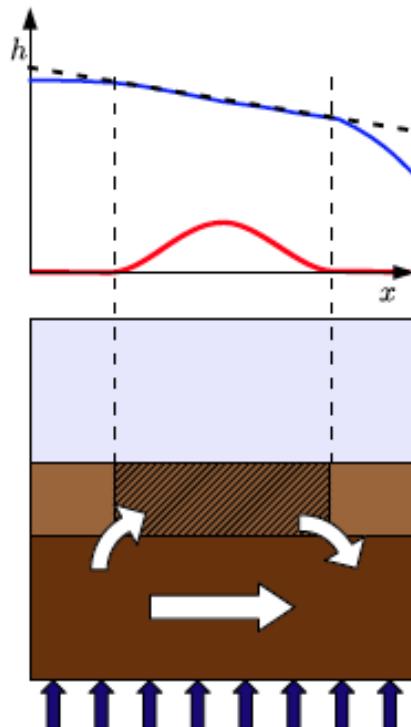

active CEL

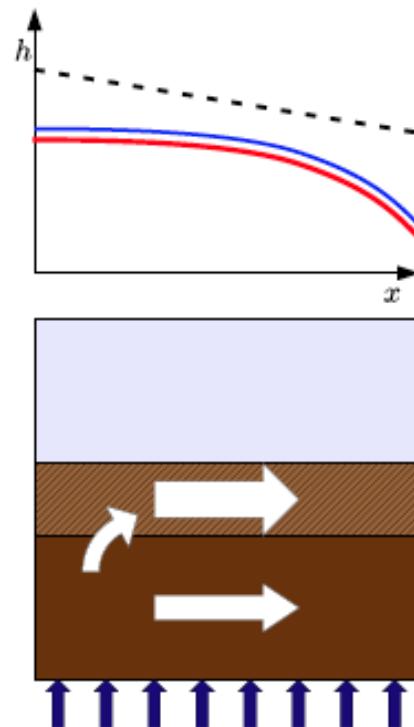


efficient CEL @deFleurian

GlaDS model

(Werder et al., 2013; Gagliardini and Werder, 2018)


Two components system, 3 variables: Φ, h, S

Network of cavities

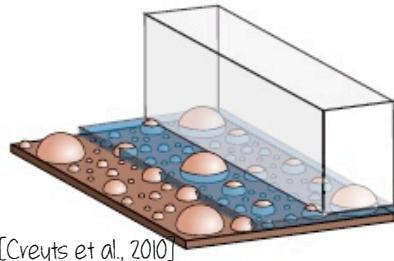


[Creufts et al., 2010]

Cavity thickness h
(nodal variable)

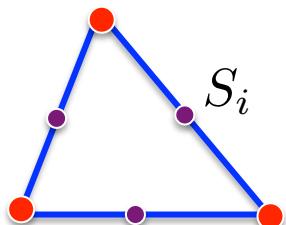

Channels

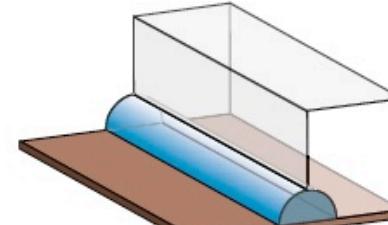

[Creufts et al., 2010]


Channel cross-sectional area : S
(edge variable)

$$\begin{aligned} & \sum_i \int_{\Omega_i} \left[\theta \frac{e_v}{\rho_w g} \frac{\partial \phi}{\partial t} - \nabla \theta \cdot \mathbf{q} + \theta (w - m_b - v) \right] d\Omega \\ & + \sum_j \int_{\Gamma_j} \left[-\frac{\partial \theta}{\partial s} Q + \theta \left(\frac{\Xi - \Pi}{L} \left(\frac{1}{\rho_i} - \frac{1}{\rho_w} \right) - v_c \right) \right] d\Gamma \\ & + \int_{\partial \Omega_N} \theta q_N d\Gamma - \sum_k \theta \left(-\frac{A_m^k}{\rho_w g} \frac{\partial \Phi}{\partial t} + Q_s^k \right) = 0, \end{aligned}$$

GlaDS model, cavities

Discharge (Darcy-Weisbach law) :

$$q = -kh^\alpha |\operatorname{grad} \phi|^{\beta-2} \operatorname{grad} \phi$$

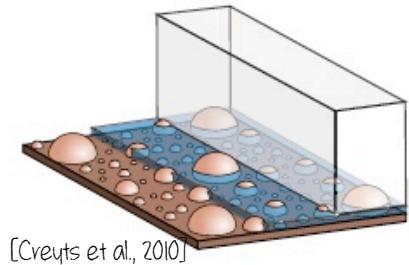

Cavity thickness evolution :

$$\frac{\partial h}{\partial t} = w(h) - v(h, \phi)$$


with

$$\begin{cases} v(h, \phi) = \tilde{A}h|N|^{n-1}N & \text{creep, closing (opening)} \\ w(h) = \max(0; \frac{u_b}{l_r}(h_r - h)) & \text{opening term} \end{cases}$$

GlaDS model, Channels

Discharge (Darcy-Weisbach law) :

$$Q = -k_c S^{\alpha_c} \left| \frac{\partial \phi}{\partial s} \right|^{\beta_c - 2} \frac{\partial \phi}{\partial s}$$

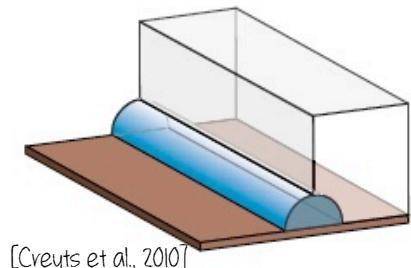

Channel cross-sectional area evolution :




$$\frac{\partial S}{\partial t} = \frac{\Xi(S, \phi) - \Pi(S, \phi)}{\rho_i L} - v_c(S, \phi)$$

with

$$\left\{ \begin{array}{ll} v_c(S, \phi) = \tilde{A}_c S |N|^{n-1} N & \text{Creep, closing (opening)} \\ \Xi(\phi) = \left| Q \frac{\partial \phi}{\partial s} \right| + \left| l_c q_c \frac{\partial \phi}{\partial s} \right| & \text{Energy dissipated} \\ \Pi(S, \phi) = -c_t c_w \rho_w (Q + f l_c q_c) \frac{\partial \phi - \phi_m}{\partial s} & \text{Sensible heat change} \end{array} \right.$$

Comparison

	Double Continuum	GlaDS
Cavity only	=	=
Channels	continuous	discrete
Coupling	$N \rightarrow u$	$N \leftrightarrow u$
Channels closing	No	Yes

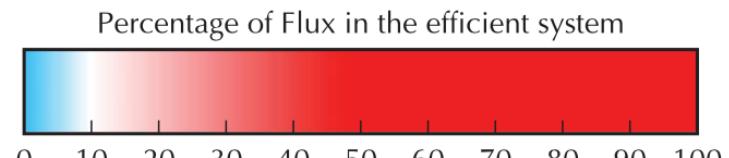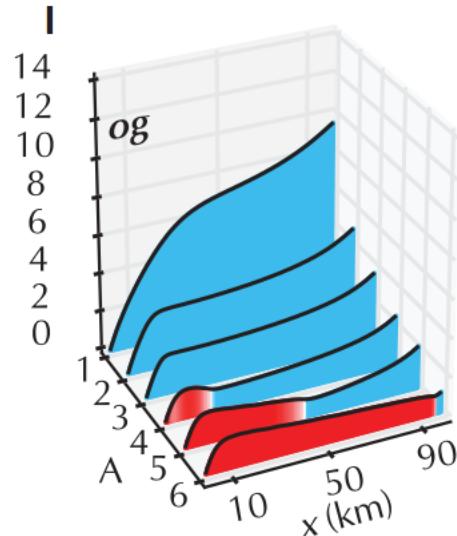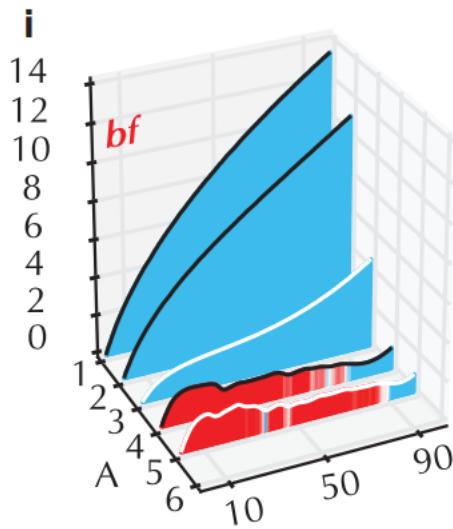

[de Fleurian et al., 2018 SHMIP paper]

Basal Conditions

✓ The Physics

- Sliding at the base of glacier
- The role of basal water
- Different drainage systems

✓ Friction laws and Hydrology

- Linear friction law
- Weertman type friction law
- Water-pressure dependant friction laws
- Double continuum hydrology model
- GlaDS model

✓ Implementation in Elmer/Ice

- Various friction laws
- GlaDS solvers

✓ Examples

Friction laws in Elmer/Ice

Friction law in Elmer:

$$C_i u_i = \sigma_{ij} n_j \text{ with } i = 1, 2, 3$$


where n is the surface normal vector

In Normal-Tangential coordinate : $n = (1, 0, 0)$

and

$$\left\{ \begin{array}{l} C_n u_n = \sigma_{nn} \\ C_{t_1} u_{t_1} = \sigma_{nt_1} \\ C_{t_2} u_{t_2} = \sigma_{nt_2} \end{array} \right.$$

Friction law applied through the two Slip Coefficients 2 and 3

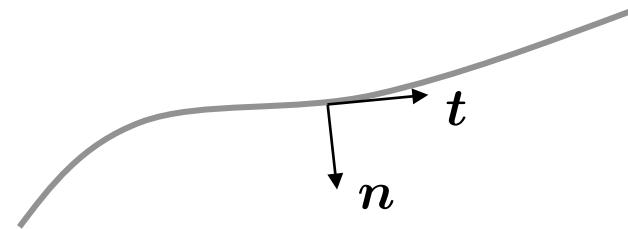

```
! Bedrock BC
Boundary Condition 1
Target Boundaries = 1

Flow Force BC = Logical True
Normal-Tangential Velocity = Logical True

Velocity 1 = Real 0.0e0
Slip Coefficient 2 = Real 0.1
Slip Coefficient 3 = Real 0.1
End
```

Friction laws in Elmer/Ice

Linear friction laws:

$$\tau_b = \beta u_b$$

```
$beta = 0.1
```

```
slip Coefficient 2 = Real $ beta  
slip Coefficient 3 = Real $ beta
```

Non-Linear friction laws:

Need a User Function to evaluate the Slip Coefficient

Rewrite the friction law in the form $\tau_b = C_t(u_b)u_b$

where $C_t(u_b)$ is the Slip Coefficient estimated through a user function

Weertman: $C_t(u_b) = u_b^{(1-n)/n} / A_s^{1-n}$

Schoof, 2005

Gagliardini et al., 2007

$$C_t(u_b) = CN \left(\frac{\chi u_b^{-n}}{1 + \chi^m} \right)^{1/n}$$

$$\text{with } \chi = \frac{u_b}{C^n N^n A_s}$$

Friction laws in Elmer/ice

Problem when $u_b \rightarrow 0$

The law is linearized for small velocity:

$$\begin{cases} C_t(u_b) = C_t(u_b) \text{ for } u_b > u_{t0} \\ C_t(u_b) = C_t(u_{t0}) \text{ for } u_b \leq u_{t0} \end{cases}$$

Example of a call (File USF_Sliding.f90):

```
Normal-Tangential Velocity = Logical True
Flow Force BC = Logical True

!! Water pressure given through the Stokes 'External Pressure' parameter
!! (Negative = Compressive)
External Pressure = Equals Water Pressure

Velocity 1 = Real 0.0
Slip Coefficient 2 = Variable Coordinate 1
    Real Procedure "ElmerIceUSF" "Friction_Coulomb"

!! PARAMETERS NEEDED FOR THE BASAL SLIDING LAW
Friction Law Sliding Coefficient = Real $As
Friction Law Post-Peak Exponent = Real $m
Friction Law Maximum Value = Real $C
Friction Law PowerLaw Exponent = Real $n
Friction Law Linear Velocity = Real $uto
```

GlaDS solvers

Three solvers:

- GlaDSCoupledSolver: main solver, all 3 variables ϕ, h, S are solved in a coupled way
- GlaDSsheetThickDummy: just here to declare h (to save previous values)
- GlaDSchannelOut: just here to export in VTU format edge type variables (not accounted for by ResultOutput solver).

Coupling with SSA: user functions HorizontalVelo and OverburdenPressure.

Including Moulins (101 boundary elements) in serial or parallel meshes : python tool makemoulin.py in Meshers\

Basal Conditions

✓ The Physics

- Sliding at the base of glacier
- The role of basal water
- Different drainage systems

✓ Friction laws and Hydrology

- Linear friction law
- Weertman type friction law
- Water-pressure dependant friction law
- Double continuum hydrology model
- GlaDS model

✓ Implementation in Elmer/Ice

- Various friction laws

✓ Examples

Examples

Friction :

Weertman

- Tests/GL_MISMIP, Tests/Contact, Tests/Friction_Weertman.
- <http://elmerice.elmerfem.org/wiki/doku.php?id=userfunctions:weertman>

Coulomb

- Tests : Tests/Friction_Coulomb and Tests/Friction_Coulomb_Pw
- <http://elmerice.elmerfem.org/wiki/doku.php?id=userfunctions:coulomb>

Budd

- http://elmerice.elmerfem.org/wiki/doku.php?id=userfunctions:budd#general_description

Hydrology :

Double continuum approach

- Tests/Hydro_SedOnly and Tests/Hydro_Coupled
- <http://elmerice.elmerfem.org/wiki/doku.php?id=solvers:hydrologydc>

Cavity sheet and discrete channels

- Tests/GlaDS, GlaDS_SSA, GlaDS_3dMesh, GlaDS_3dInt
- <http://elmerice.elmerfem.org/wiki/doku.php?id=solvers:glaids>

References

- de Fleurian, B., M. Werder, S. Beyer, D. Brinkerhoff, I. Delaney, C. Dow, C., J. Dows, O. Gagliardini, M.J. Hoffman, R. LeB Hooke, J. Seguinot, A.N. Sommers, 2018. SHMIP The subglacial hydrology model intercomparison Project. *Journal of Glaciology*, 1-20. doi:10.1017/jog.2018.78
- Gagliardini O. and M. Werder, 2018. Influence of increasing surface melt over decadal timescales on land-terminating Greenland-type outlet glaciers, *Journal of Glaciology*, 64(247), 700-710, doi:10.1017/jog.2018.59
- Gladstone, R.M., R.C. Warner, B.K. Galton-Fenzi, O. Gagliardini, T. Zwinger and R. Greve, 2017. Marine ice sheet model performance depends on basal sliding physics and sub-shelf melting, *The Cryosphere*, 11, 319-329, doi:10.5194/tc-11-319-2017
- de Fleurian, B., O. Gagliardini, T. Zwinger, G. Durand, E. Le Meur, D. Mair, and P. Råback, 2014. A double continuum hydrological model for glacier applications, *The Cryosphere*, 8, 137-153, doi:10.5194/tc-8-137-2014.
- Gagliardini, O., T. Zwinger, F. Gillet-Chaulet, G. Durand, L. Favier, B. de Fleurian, R. Greve, M. Malinen, C. Martín, P. Råback, J. Ruokolainen, M. Sacchettini, M. Schäfer, H. Seddik, and J. Thies, 2013. Capabilities and performance of Elmer/Ice, a new-generation ice sheet model, *Geosci. Model Dev.*, 6, 1299-1318, doi: 10.5194/gmd-6-1299-2013.
- Gagliardini O., D. Cohen, P. Råback and T. Zwinger, 2007. Finite-Element Modeling of Subglacial Cavities and Related Friction Law. *J. of Geophys. Res., Earth Surface*, 112, F02027.