

A real world application

Tête Rousse Glacier

Olivier GAGLIARDINI

IGE - Grenoble - France

Tête Rouse Glacier

✓ Context

- The history of Tête Rouse Glacier
- The 2010 water filled-cavity
- Analysis of the cavity roof stability (Autumn 2010)

✓ Step 1

- Tête Rouse Glacier flow without a water filled-cavity (diagnostic)


✓ Step 2

- Influence of an empty cavity below Tête Rouse Glacier (diagnostic)

✓ Step 3

- Rate of closure of the cavity for a given drainage scenario (prognostic)

Location (Mont Blanc Area, France Alps)

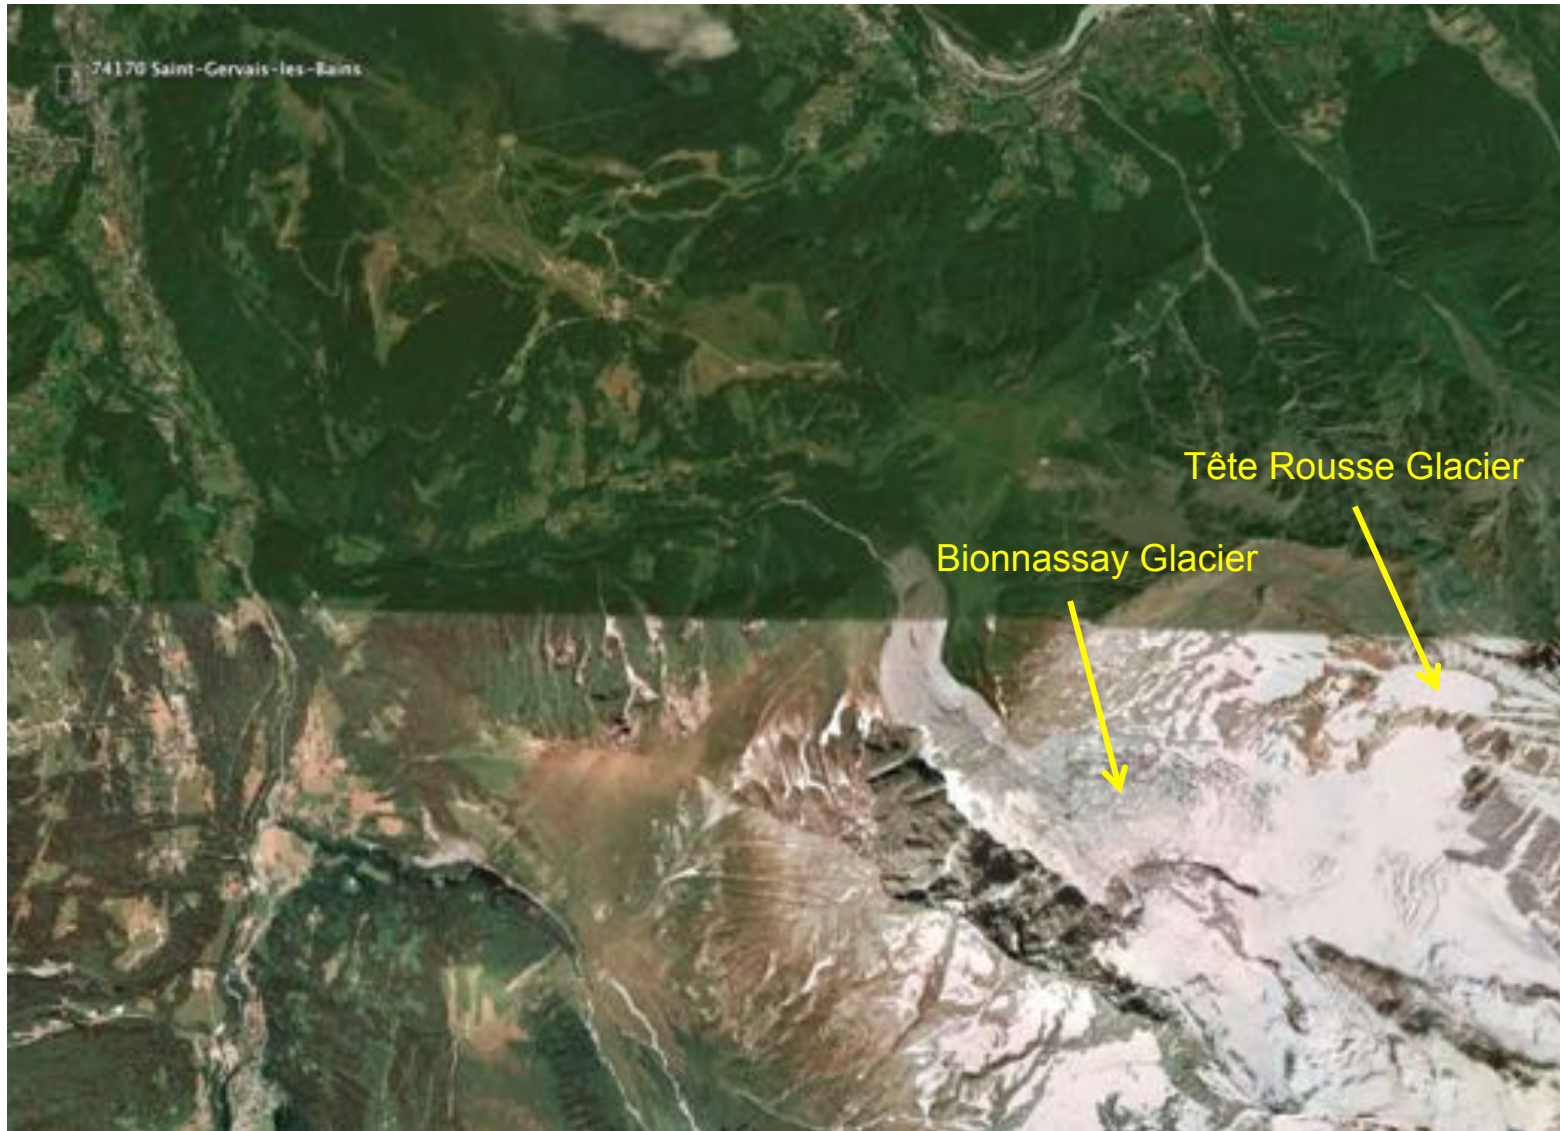

Location (Mont Blanc Area, France Alps)

Tête Rousse glacier
3100 to 3300 m
0.08 km² (2007)



@B. Jourdain

Chronology

The Past History – The 1892 catastrophe

Contemporary history:

2007-10 - Studies to answer the question about the necessity to maintain the tunnel

07/2010 - A water filled cavity under pressure is discovered

- Crisis – Artificial drainage

2011 - Small research program to understand the formation of the cavity

- New crisis – Artificial drainage

2012 - New Artificial drainage needed

2016 - Still under survey – build of an artificial spillway

The 1892 catastrophe

11 July 1892

175 fatalities

100 000 m³ of water

Flood produced

800 000 m³ of sediment



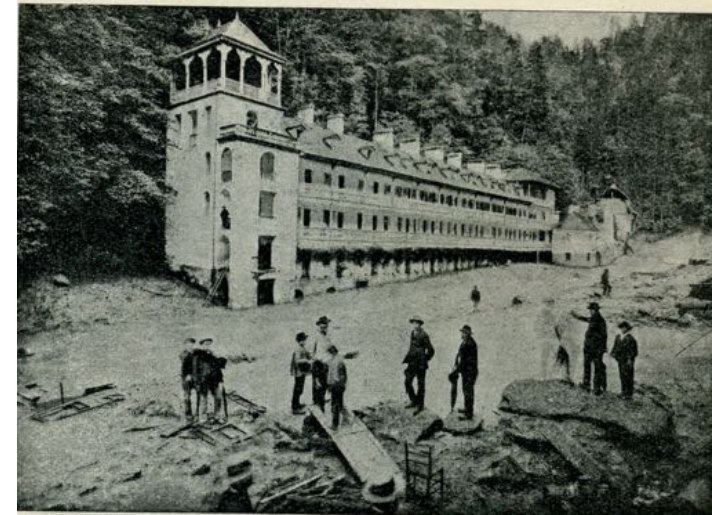


Fig. 22. — Le pont de la route départementale n° 4 tourné et submergé par la lave.
13 juillet 1892. — Cliché Koss.


@Vincent, LGGE

The 1892 catastrophe

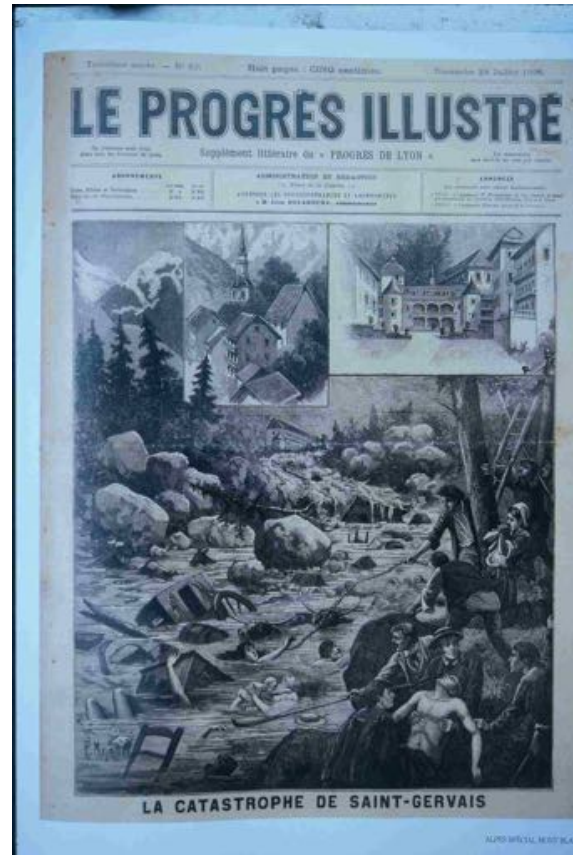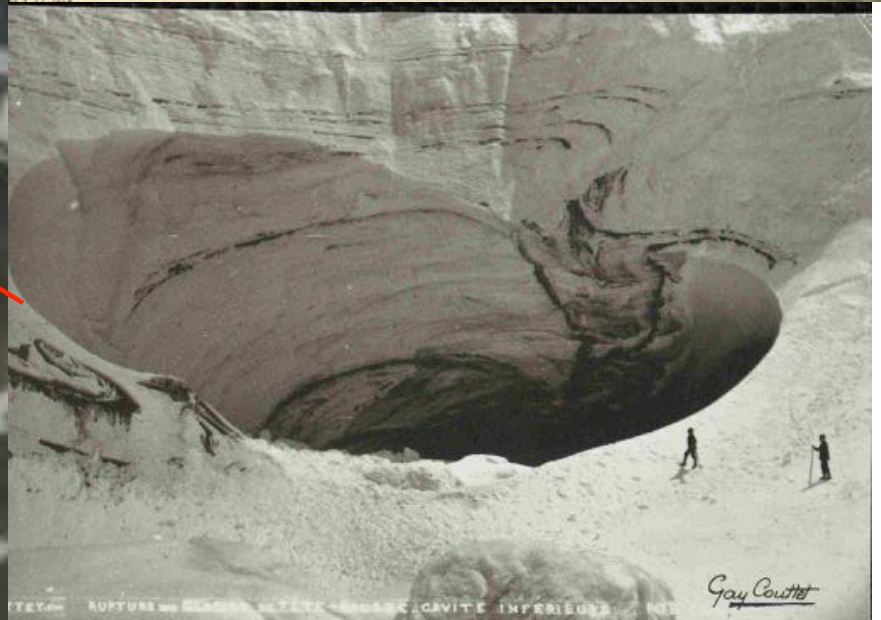

Is there still a risk at Tête Rousse ?

Question asked by authorities in 2007

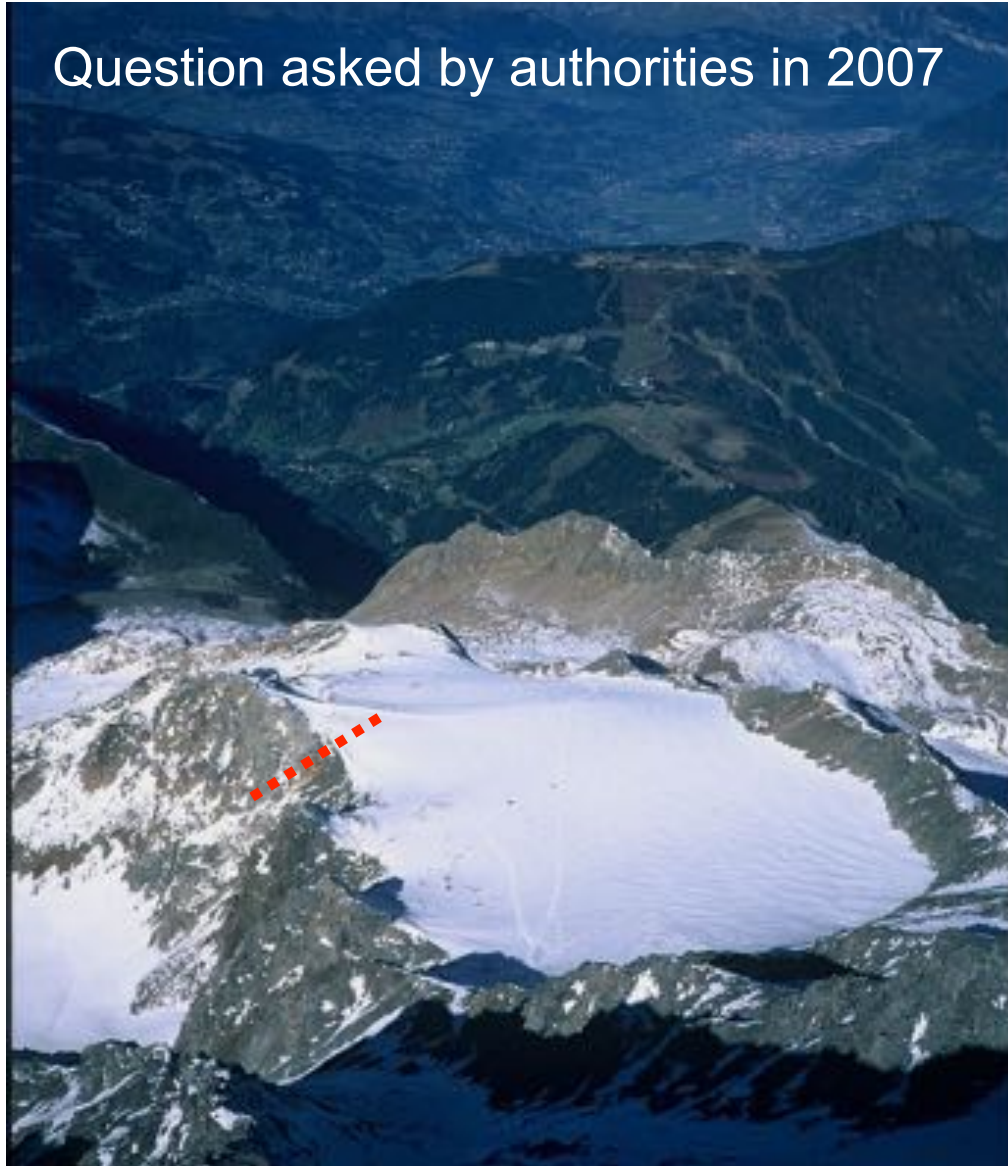

@Vincent, LGGE

O. GAGLIARDINI - 28&29 October 2019 - Reykjavik


Glaciological studies

- . Topographic measurements
- . Radar measurements
- . Temperature measurements
- . Mass balance measurements



@Vincent, LGGE

Glaciological studies

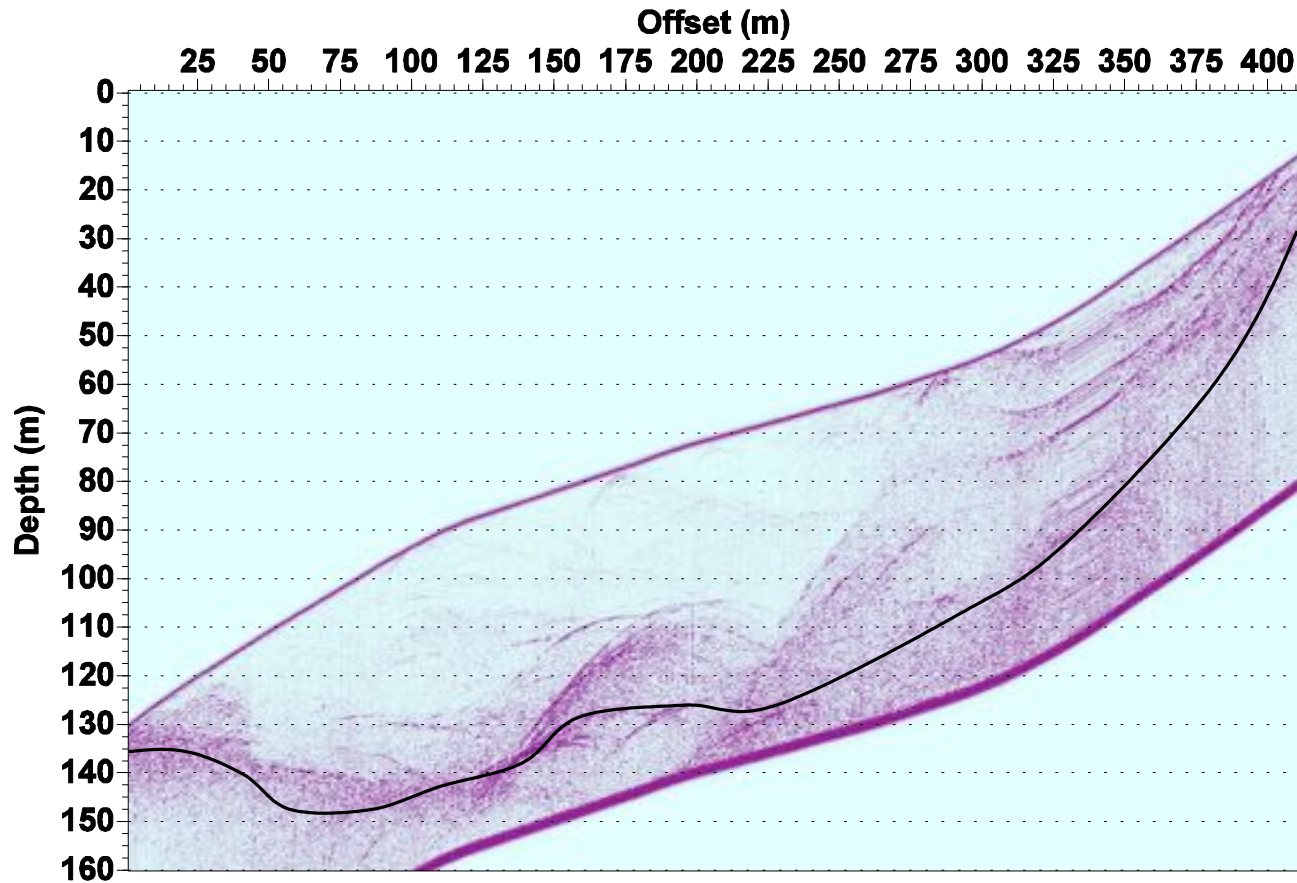

@Vincent, LGGE

The radar measurements showed a zone (volume) with an anomaly.

Glaciological studies


In Sept 2009, geophysical survey using the
Magnetic Resonance Imaging (LTHE, Grenoble)



@Vincent, LGGE

O. GAGLIARDINI - 28&29 October 2019 - Reykjavik

Glaciological studies

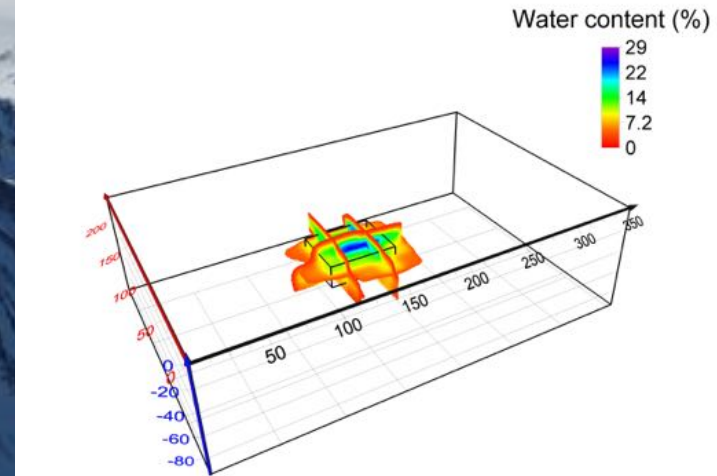

Water volume of 65 000 m³

Report presented to public authorities in March 2010

@Vincent, LGGE

Pressure measurements



20 hot-water drillings performed from
29 June to 8 July 2010

Confirm the presence of a cavity
and that

the cavity is under pressure!



Decisions

The hydrostatic pressure exceeded the ice pressure due to the weight of the ice column

We could expect that the water contained in the glacier would be released suddenly

The public authorities have been warned immediately (13 July, 2010)

It has been decided to drain the subglacial lake as soon as possible, because 3000 people were threatened in the valley.

A difficult field work



Drainage of the cavity


The artificial drainage started the 26 of August



A new risk ?

But was stopped on the 1st of September :

What was the risk of collapse of the cavity roof induced by the artificial drainage?

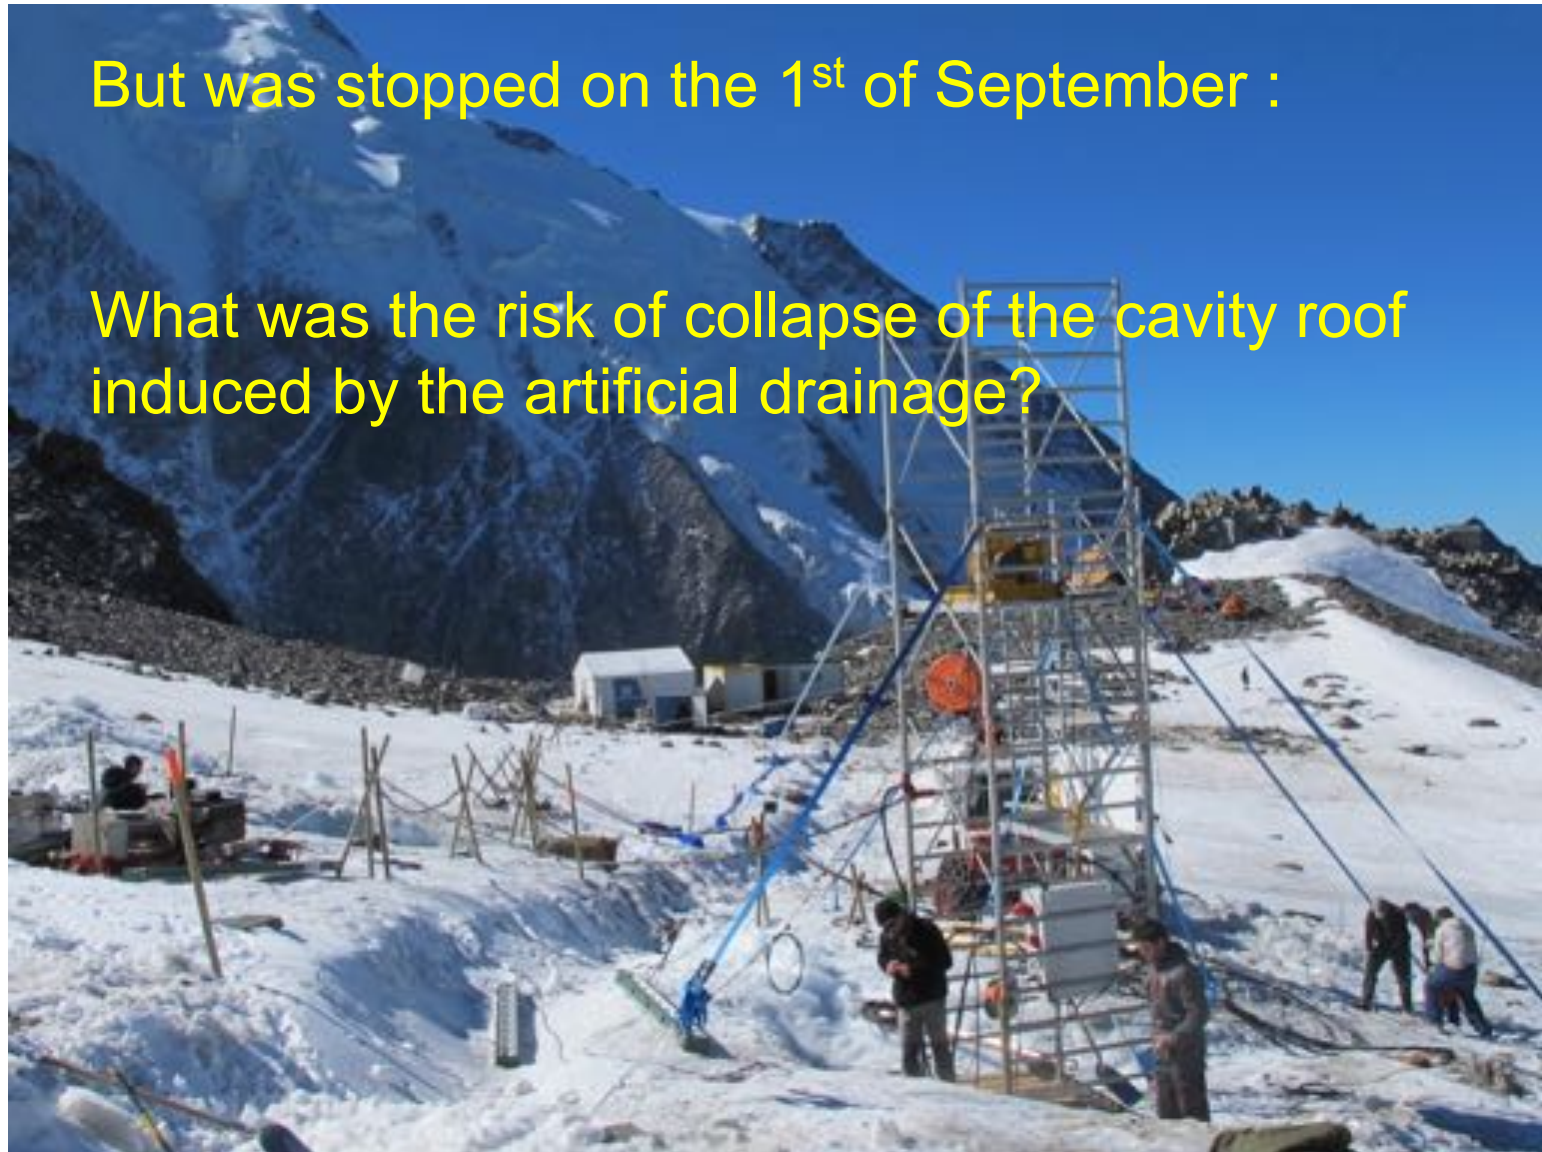


The 2010 cavity

Pumping of 47 700 m³ from 25 August to 8 October 2010

Question (addressed end of August 2010):

What is the risk of break-up during the pumping phase?

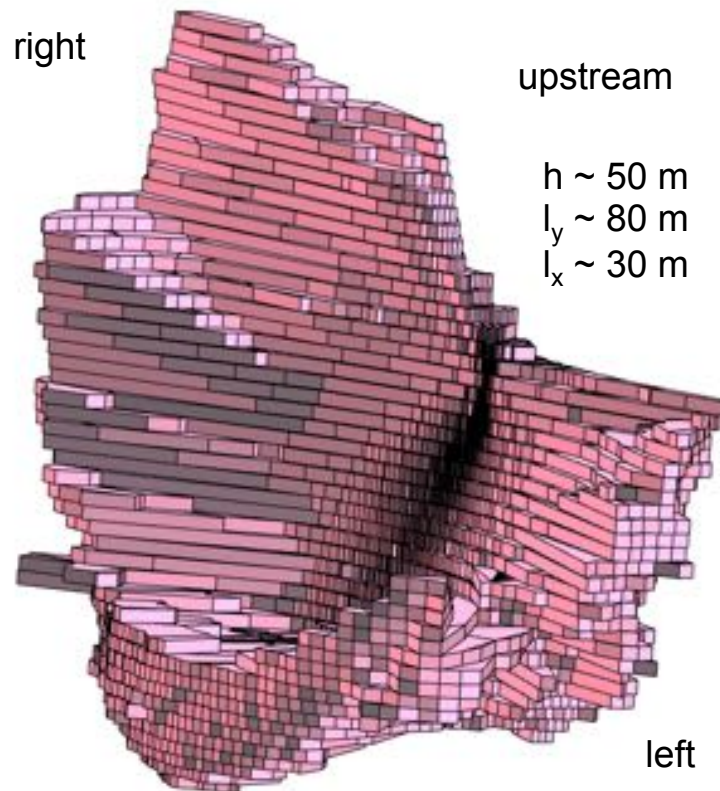

Time-line for investigations

Sonar data

Septembre

D	L	M	E	J	V	S
			1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30		

Meeting with the mayor of St Gervais

Proposed application


Construct a model of the flow of Tête Rousse Glacier

- Step 1: Without the cavity (normal state)
- Step 2: Add an empty cavity (stress analysis)
- Step 3: Rate of closure of the cavity

(surface deformation analysis)

Data for ice flow modelling

- Bedrock DEM
- 2007 Surface DEM
- Cavity topography from sonar measurements
- Few surface velocities, without the empty cavity (0.6 m/a at the centre of the glacier)
- 27 Stakes to measure surface displacement during drainage

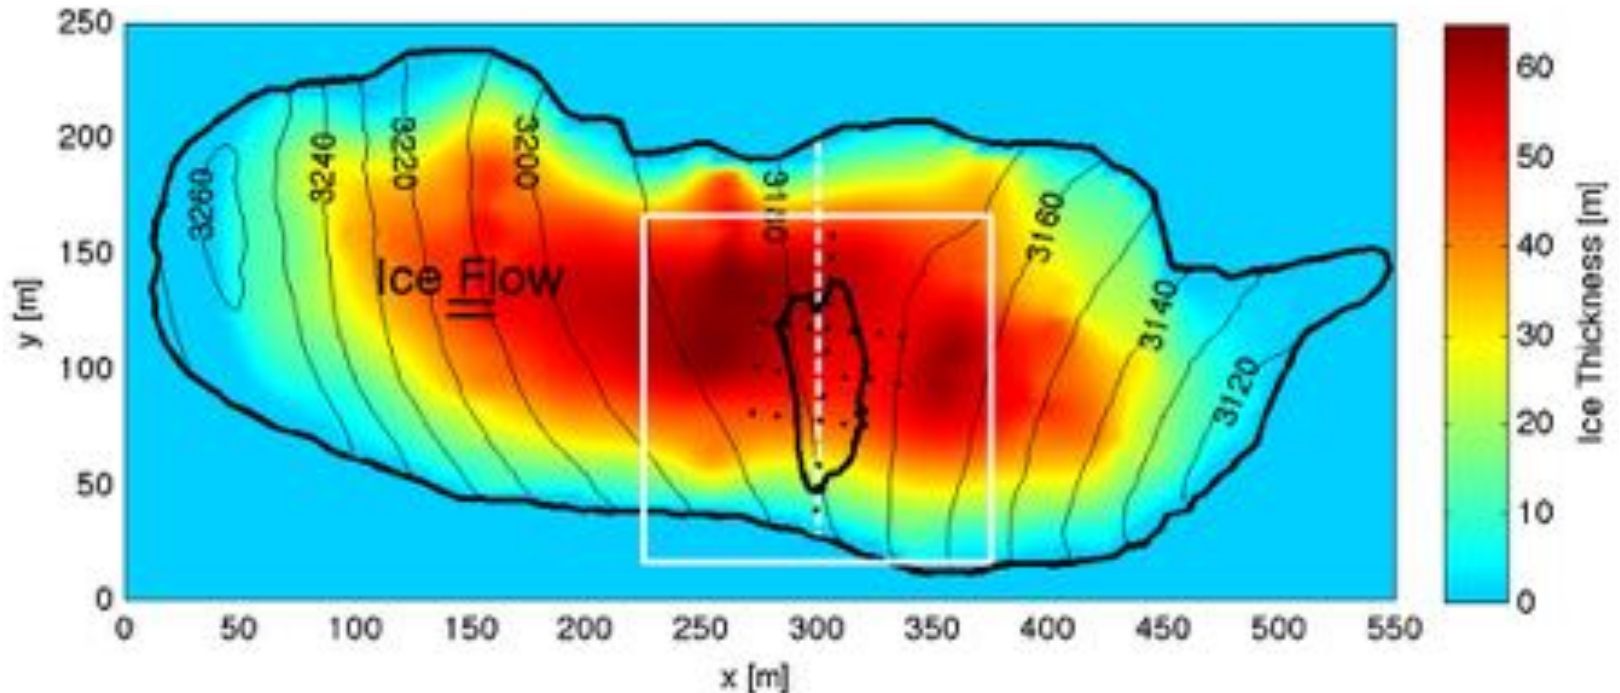

Material:

README.txt

Data: Contour_TR_cavity.dat, Contour_TR_glacier.dat, DEM_TR_bed.dat, DEM_TR_cavity.dat, DEM_TR_surf.dat

PROG: USF_TR.f90

Step1: Makegeo.py, teterousse1.sif

Step2a: Makegeo_2.py, teterousse2a.sif

Step2b: teterousse2b.sif

Step3a: teterousse3a.sif

Step3b: teterousse3b.sif

Modelling Tête Rousse Glacier

- ✓ **Step 1** - Tête Rousse Glacier flow without a water filled-cavity (diagnostic)

- ✓ **Step 2**
 - 2a Influence of an empty cavity below Tête Rousse Glacier (diagnostic)
 - 2b Apply a water pressure in the cavity

- ✓ **Step 3**
 - 3a Rate of closure of the cavity for a given drainage scenario (prognostic)
 - 3b Add a drainage scenario

Step 1: Work to do

- create the mesh
- impose the boundary conditions in the SIF file
- test other BCs on the lateral boundary
- test sliding at the base of the glacier


Step 1: steps to make the mesh

1/ build the `teterousse0.geo` file (input file of GMSH, footprint of the glacier)

2/ `gmsht` to get `teterousse0.msh` (still footprint of the glacier)

3/ `ElmerGrid` to transform into Elmer format (still footprint of the glacier)

4/ we will use the internal extrusion feature in Elmer to create a volume from this footprint (see the `sif` file)

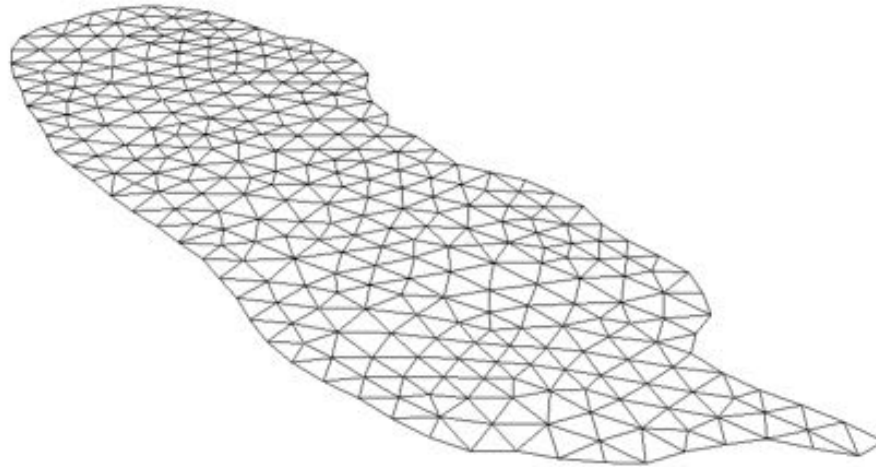

Step 1: Makegeo.py (create a .geo file)

The python script Makegeo.py :

- read the point coordinates in the contour file
- create the teterousse0.geo file (input file for GMSH)

Options :

- the contour can be made of one spline or many lines in between points
- one can choose the size of the elements around the contour

Step 1: GMSH (create a .msh file)

```
> gmesh teterousse0.geo -1 -2
```

help: <http://www.geuz.org/gmsh/>

line commands:

"-2" performs 1D and 2D mesh generation and then exit

```
> ElmerGrid 14 2 teterousse0.msh -autoclean
```

transform a GMSH mesh (14) into an Elmer mesh (2)

```
> ElmerGrid 14 5 teterousse0.msh -autoclean
```

transform a GMSH mesh (14) into a vtu file (5)

use Paraview to visualize the mesh

Step 1: In the sif file

Define the number of vertical layers (Simulation section):

```
Simulation
  Coordinate System = Cartesian 3D
  Simulation Type = Steady

  Extruded Mesh Levels = Integer 16

  ...
End
```

The second solver to be executed is the StructuredMeshMapper

```
Solver 2
  Equation = "MapCoordinate"
  Procedure = "StructuredMeshMapper" "StructuredMeshMapper"
  Active Coordinate = Integer 3           (3d problem - mesh moves in z direction)
  Mesh Velocity Variable = String "dSdt"
  Mesh Update Variable = String "dS"
  Mesh Velocity First Zero = Logical True
  Displacement Mode = Logical False
  Correct Surface = Logical True
  Minimum Height = Real 1.0
} zs = min(zs, bed+1.0)
End
```

Step 1: In the sif file

Read, interpolate and store in 2 variables the bed and surface DEM

Solver 1

```
Exec Solver = "Before Simulation"
```

```
Equation = "Read DEMs"
```

```
Procedure = "ElmerIceSolvers" "Grid2DInterpolator"
```

```
! Bedrock DEM
```

```
Variable 1 = String "bedDEM"
```

```
Variable 1 data file = File "../Data/DEM_TR_bed.dat" name of the DEM file
```

```
Variable 1 x0 = Real 947700.0d0
```

```
Variable 1 y0 = Real 2104850.0d0
```

```
Variable 1 lx = Real 600.0
```

```
Variable 1 ly = Real 350.0
```

```
Variable 1 Nx = Integer 301
```

```
Variable 1 Ny = Integer 176
```

```
Variable 1 Invert = Logical False
```


```
Variable 1 Fill = Logical False
```

```
Variable 1 Position Tol = Real 1.0e-1
```

```
Variable 1 No Data = Real -9999.0
```

```
Variable 1 No Data Tol = Real 1.0
```

define the DEM file structure

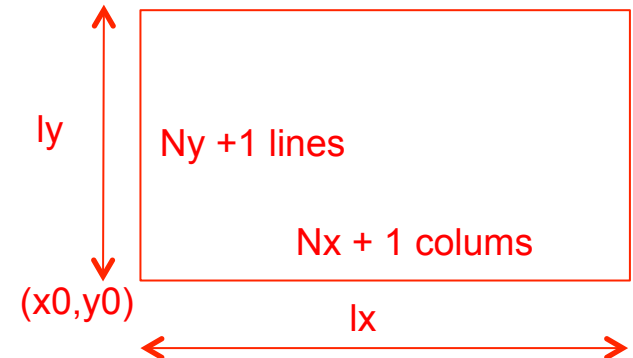

```
! Surface DEM ...
```

End

Step 1: In the sif

BedDEM and ZsDEM (variable) must be declared in one solver (Stokes for example)

```
Exported Variable 3 = -dofs 1 "BedDEM"  
Exported Variable 4 = -dofs 1 "ZsDEM"
```

Keywords Bottom Surface and Top Surface (needed by the solver StructuredMeshMapper) are assigned the value of these two variables

```
!Bed rock BC  
Boundary Condition 2  
  Bottom Surface = Equals BedDEM
```

...

End

```
! Upper Surface BC  
Boundary Condition 3  
  Top Surface = Equals ZsDEM
```

End

Step 1: use Glen's law

$$D_{ij} = A \tau_e^{n-1} S_{ij} \quad ; \quad S_{ij} = A^{-1/n} I_{D_2}^{(1-n)/n} D_{ij}$$

$$A = A(T') = A_0 \exp^{-Q/RT'}$$

$$A = A_1 = 2.89 \times 10^{-13} \text{ s}^{-1} \text{ Pa}^{-3} \text{ if } T \leq -10^\circ\text{C}$$

$$A = A_2 = 2.43 \times 10^{-2} \text{ s}^{-1} \text{ Pa}^{-3} \text{ if } T \geq -10^\circ\text{C}$$

$$Q = Q_1 = 60 \text{ kJ mol}^{-1} \text{ if } T \leq -10^\circ\text{C}$$

$$Q = Q_2 = 115 \text{ kJ mol}^{-1} \text{ if } T \geq -10^\circ\text{C}$$

Cuffey and Paterson (2010)

Paterson 2010		
A*	3.50000E-25	s ⁻¹ Pa ⁻³
A1	2.89165E-13	s ⁻¹ Pa ⁻³
A2	2.42736E-02	s ⁻¹ Pa ⁻³
Q1	60000	J/mol
Q2	115000	J/mol
T [°C]	A [s ⁻¹ Pa ⁻³]	A [s ⁻¹ MPa ⁻³]
0	2.4029E-24	75.830
-1	1.9945E-24	62.942
-2	1.6533E-24	52.173
-3	1.3685E-24	43.186
-4	1.1312E-24	35.698
-5	9.3370E-25	29.465
-6	7.6958E-25	24.286
-7	6.3339E-25	19.988
-8	5.2054E-25	16.427
-9	4.2716E-25	13.480
-10	3.5000E-25	11.045
-10	3.5000E-25	11.045
-11	3.1520E-25	9.947
-12	2.8363E-25	8.951
-13	2.5501E-25	8.048
-14	2.2910E-25	7.230
-15	2.0544E-25	6.490
-16	1.8444E-25	5.820
-17	1.6528E-25	5.216
-18	1.4798E-25	4.670
-19	1.3238E-25	4.177
-20	1.1831E-25	3.734
-21	1.0565E-25	3.334
-22	9.4260E-26	2.975
-23	8.4019E-26	2.651
-24	7.4822E-26	2.361
-25	6.6570E-26	2.101
-30	3.6580E-26	1.154
-35	1.9602E-26	0.619
-40	1.0225E-26	0.323
-45	5.1843E-27	0.164
-50	2.5496E-27	0.080

assume a constant temperature of -1°C

Step 1: use Glen's law

```
#yearinsec = 365.25*24*60*60
#rhoi = 900.0/(1.0e6*yearinsec^2)
#rhow = 1000.0/(1.0e6*yearinsec^2)
#gravity = -9.81*yearinsec^2
! Prefactor from Cuffey&Paterson (2010) in MPa^{-3} a^{-1}
#A1 = 2.89165e-13*yearinsec*1.0e18
#A2 = 2.42736e-2*yearinsec*1.0e18
#Q1 = 60.0e3
#Q2 = 115.0e3
```

$s^{-1} Pa^{-3}$ to $a^{-1} MPa^{-3}$

Material 1

```
Density = Real #rhoi
Viscosity Model = String "glen"
Viscosity = 1.0 ! Dummy but avoid warning output
Glen Exponent = Real 3.0
Limit Temperature = Real -10.0
Rate Factor 1 = Real #A1
Rate Factor 2 = Real #A2
Activation Energy 1 = Real #Q1
Activation Energy 2 = Real #Q2
Glen Enhancement Factor = Real 1.0
Critical Shear Rate = Real 1.0e-10
```

```
Constant Temperature = Real -1.0
```

End

Step 1: Hypothesis of the modelling


Solve only the Stokes equation in a diagnostic way

3 boundary conditions

Upper Surface BC:
stress free surface
(natural BC)

Bedrock BC:
No sliding condition

Lateral BC:
zero horizontal velocities

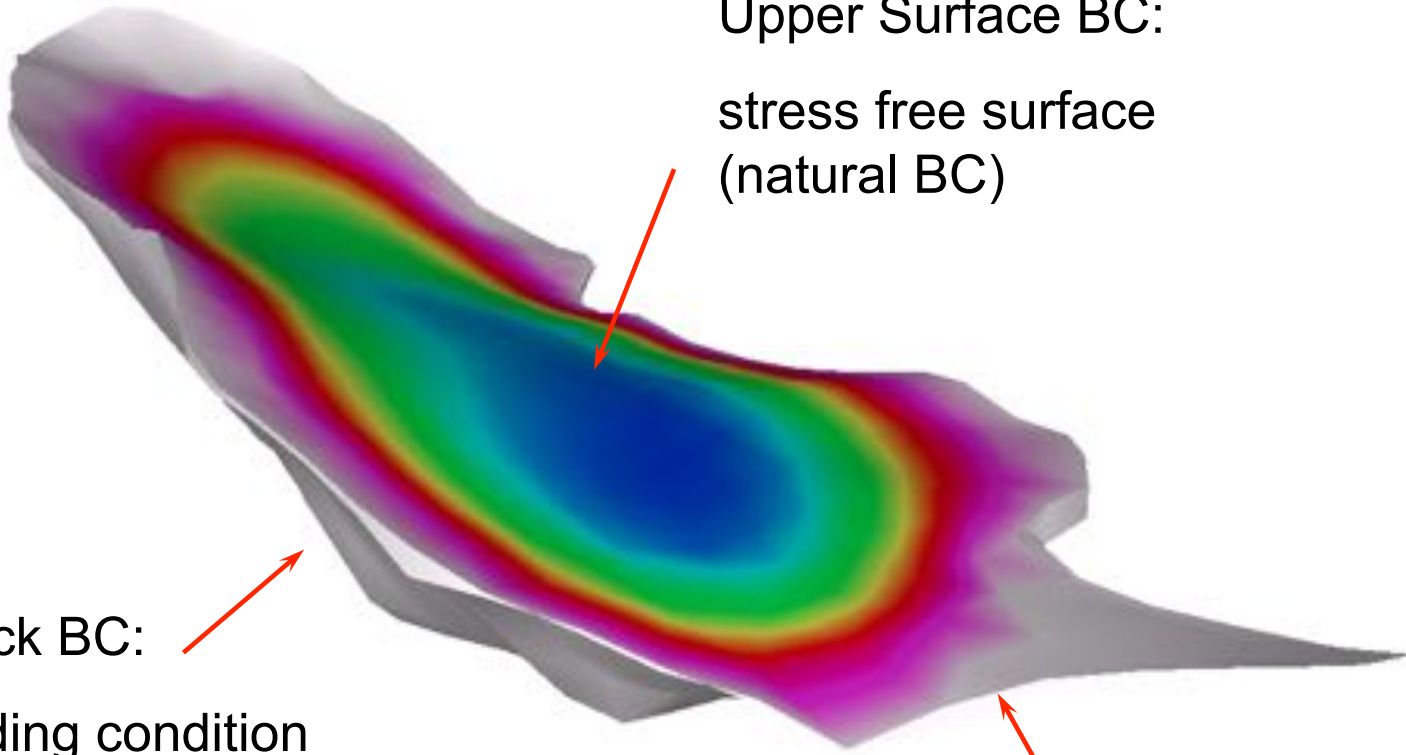

Step 1: Boundary Conditions

```
! lateral side of the glacier
```

```
Boundary Condition 1
```

```
Target Boundaries = 1
```

```
Velocity 1 = real 0.0
```

```
Velocity 2 = real 0.0
```

```
End
```

Null horizontal velocities

```
! Bedrock
```

```
Boundary Condition 2
```

```
Bottom Surface = Equals BedDEM
```

```
Velocity 1 = Real 0.0
```

```
Velocity 2 = Real 0.0
```

```
Velocity 3 = Real 0.0
```

```
End
```

No sliding

```
! Upper Surface
```

```
Boundary Condition 3
```

```
Top Surface = Equals ZsDEM
```

```
End
```

**Natural BC,
nothing to do!**

Step 1: Stress Solver

Objective: compute the stress field as

$$\int_V S_{ij} \Phi \, dV = 2 \int_V \eta D_{ij} \Phi \, dV$$

where D_{ij} and η are calculated from the nodal velocities using the derivative of the basis functions

```
Solver 4
  Equation = Sij
  Procedure = "ElmerIceSolvers" "ComputeDevStress"
  Variable = -nooutput "Sij"
  Variable DOFs = 1
  Exported Variable 1 = Stress
  Exported Variable 1 DOFs = 6

  Flow Solver Name = String "Flow Solution"

  Linear System Solver = Direct
  Linear System Direct Method = umfpack
End
```

Step 1: Stress Solver

- Tell you want the Cauchy stress to be computed (Material Section)
(else you will get the deviatoric stress)

```
Material 1  
  Cauchy Stress = Logical True  
End
```

- Output : negative stress = Compressive stress
 positive stress = Tensile stress

Stress.1	→	S_{xx}	Stress.4	→	S_{xy}
Stress.2	→	S_{yy}	Stress.5	→	S_{yz}
Stress.3	→	S_{zz}	Stress.6	→	S_{xz}

Step 1: Eigenvalues Solver

Objective: compute the eigenvalues of the Cauchy stress tensor

```
Solver 5
```

```
Equation = "EigenStresses"
```

```
Procedure = "ElmerIceSolvers" "ComputeEigenValues"
```

```
Variable = -nooutput dummy
```

```
Variable DOFs = 1
```

```
! The 3 eigenvalues
```

```
Exported Variable 1 = EigenStress
```

```
Exported Variable 1 DOFS = 3
```

```
! The 3 eigenvectors (Option)
```

```
Exported Variable 2 = EigenVector1
```

```
Exported Variable 2 DOFS = 3
```

```
Exported Variable 3 = EigenVector2
```

```
Exported Variable 3 DOFS = 3
```

```
Exported Variable 4 = EigenVector3
```

```
Exported Variable 4 DOFS = 3
```

```
End
```

Step 1: Eigenvalues Solver

Output : negative stress = Compressive stress
 positive stress = Tensile stress
 ordered \rightarrow Eigenstress.3 gives the maximal tensile stress

Eigenstress.1 \rightarrow S_1
Eigenstress.2 \rightarrow S_2
Eigenstress.3 \rightarrow S_3


Step 1: Add sliding on the bedrock

Friction law in Elmer (2d case illustrated):

$$C_i u_i = \sigma_{ij} n_j \quad (i = 1, 2)$$

→ $C_t u_t = \sigma_{nt} ; C_n u_n = \sigma_{nn}$

where n is the surface normal vector

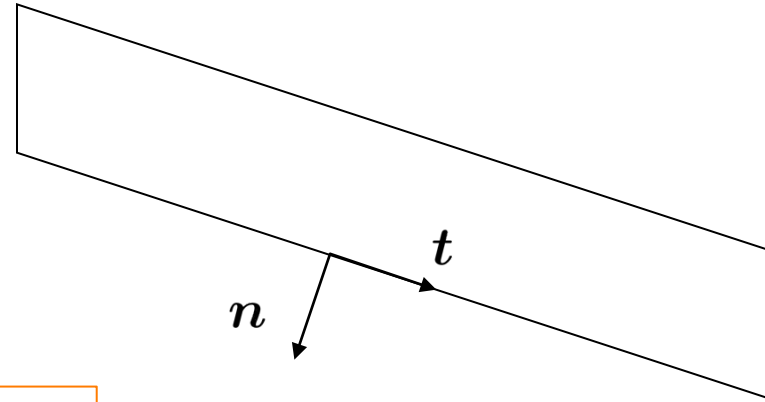

```
! Bedrock BC
Boundary Condition 2
. . .
Normal-Tangential Velocity = Logical True

Velocity 1 = Real 0.0e0
Slip Coefficient 2 = Real 0.1
Slip Coefficient 3 = Real 0.1
End
```

How to evaluate the Slip Coefficient ?

Step 1: Other BCs for the lateral boundary

```
! lateral side of the glacier  
Boundary Condition 1  
  Target Boundaries = 1  
End
```

Natural BC

```
! lateral side of the glacier  
Boundary Condition 1  
  Target Boundaries = 1  
  Velocity 1 = real 0.0  
  Velocity 2 = real 0.0  
  Velocity 3 = real 0.0  
End
```

zero velocity

Conclusion ?

Modelling Tête Rouse Glacier


- ✓ **Step 1** - Tête Rouse Glacier flow without a water filled-cavity (diagnostic)

- ✓ **Step 2**
 - 2a Influence of an empty cavity below Tête Rouse Glacier (diagnostic)
 - 2b Apply a water pressure in the cavity


- ✓ **Step 3**
 - 3a Rate of closure of the cavity for a given drainage scenario (prognostic)
 - 3b Add a drainage scenario

Step 2a: Add the cavity (empty of water)

The initial problem

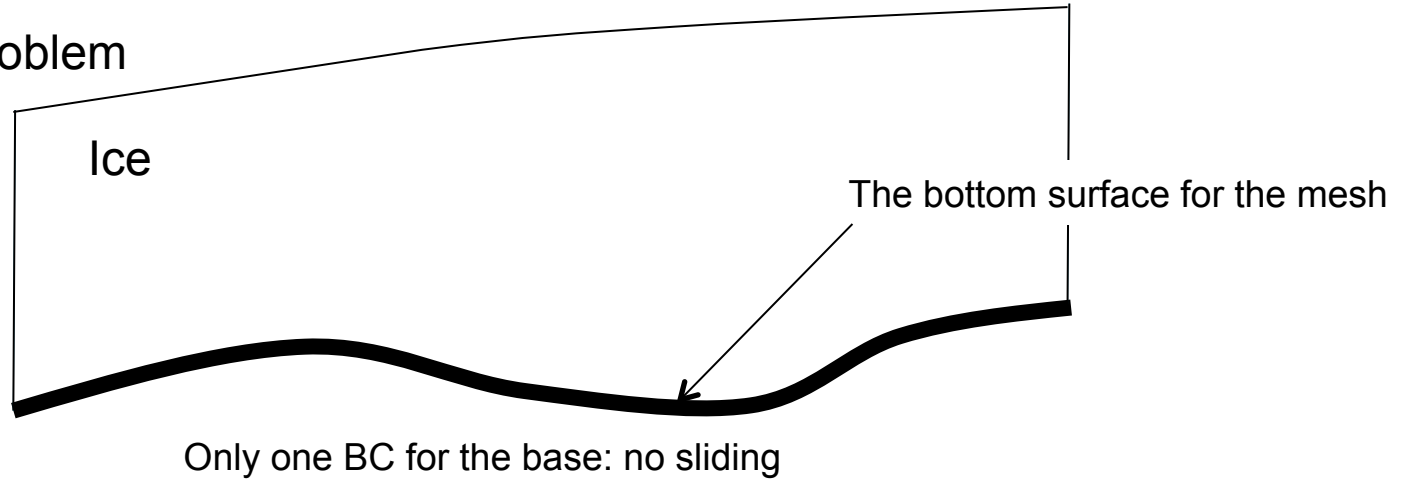

The new problem

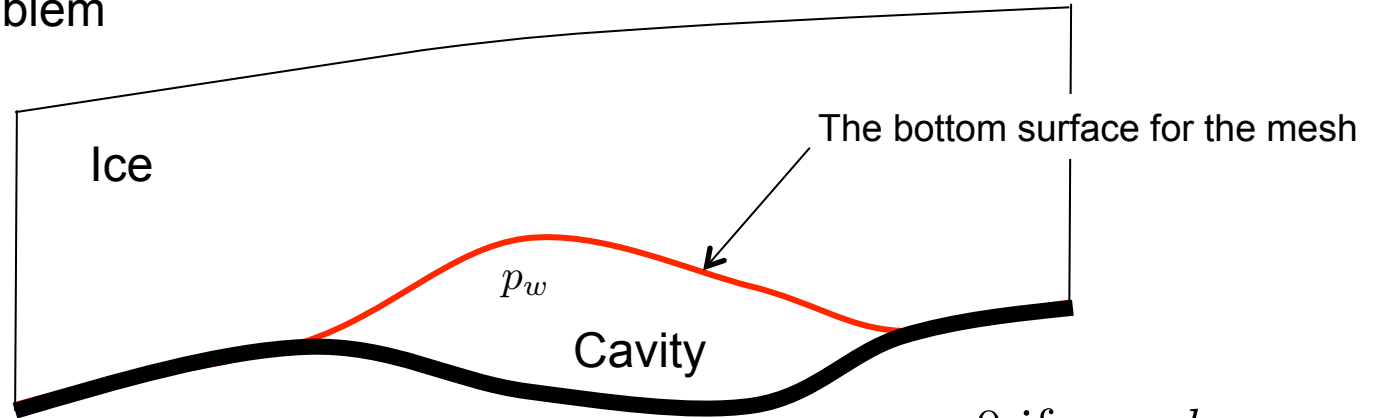

!!! The ice bottom surface is not anymore given by the bedrock DEM !!!

Two BCs for the base:

$$\mathbf{u} = 0 \text{ if } z_b = b$$

$$\sigma_{nn} = p_w \text{ if } z_b > b$$

$$p_w = 0 \text{ if the cavity is empty of water}$$

Step 2a: new Bottom Surface definition

The bottom surface of the ice is now given by the DEM_TR_cavity.dat DEM file.

Change the StructuredMeshMapper to read this DEM and store it in the ZbDEM variable

Declare this new variable (in Stokes solver section):

```
Exported Variable 5 = -dofs 1 "ZbDEM"
```

Change the boundary condition 2:


```
Boundary Condition 2
```

```
    Bottom Surface = Equals ZbDEM
```

```
End
```

Step 2a: Make a new mesh

We will use the cavity contour to have smaller size elements in the vicinity of the cavity

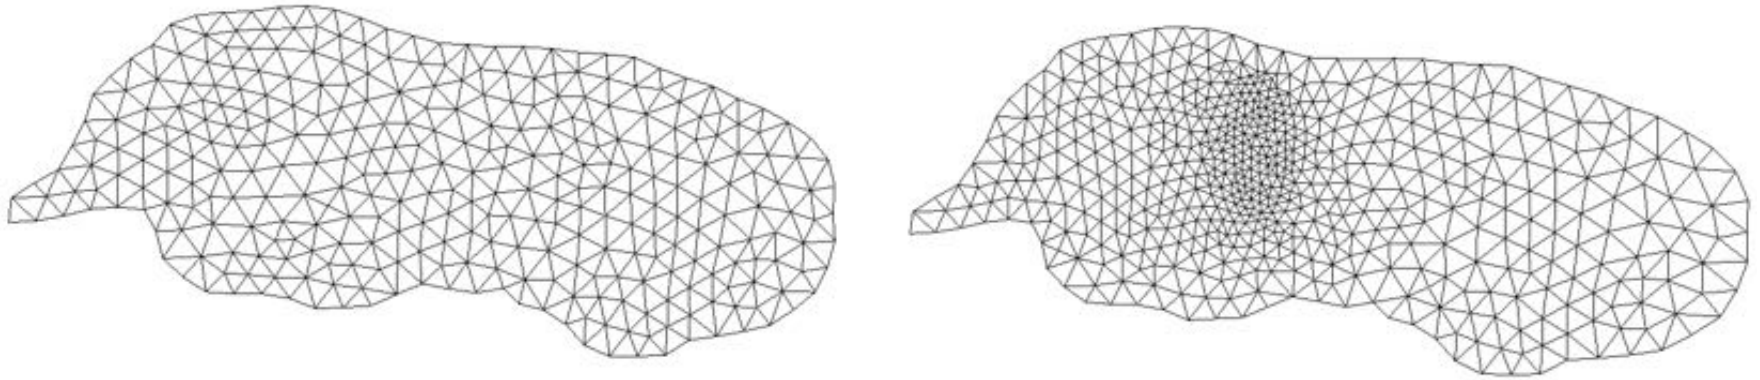

Work to do : modify the `Makegeo.py` file to create this new mesh

Step 2a: Make a new mesh (Makegeo_2.py) 1/2

The python script Makegeo_2.py :

- read the point coordinates in two contour files (cavity and glacier)
- create the teterousse.geo file (input file for GMSH)

Options :

- the contour can be made of one spline or many lines in between points
- one can choose the size of the elements around the two contours

Make the mesh :

```
> gmsh teterousse.geo -1 -2  
> ElmerGrid 14 2 teterousse.msh -autoclean
```

See the difference between the two python script:

```
> diff Makegeo_2.py ../Step1/Makegeo.py
```

Step 2a: Change in the basal BC

The basal BC will be of the form:

```
Velocity 1 = Real 0.0
Velocity 1 Condition = Variable ZbDEM, BedDEM
Real LUA "(function() if tx[0] > (tx[1] + 0.01) then
return -1.0 else return 1.0 end end) ()"
```

See alternatives 2 and 3 in LUA in the sif file

Velocity 1 Condition = -1 if zbDEM > BedDEM => Don't apply "Velocity 1 = 0"
 = +1 if zbDEM <= BedDEM => Apply "Velocity 1 = 0"

And the same for Velocity 2 and Velocity 3.

Visualize the results in Paraview

What does it change in term of velocity and stress?

Step 2a: Change in the basal BC

2nd Solution – use a f90 user function instead of LUA language

The basal BC will be of the form:

```
Velocity 1 = Real 0.0  
Velocity 1 Condition = Variable ZbDEM, BedDEM  
Real Procedure "../PROG/USF_TR" "MaskCavity"
```

Compile the user function USF_TR.f90 in PROG/

```
elmerf90 USF_TR.f90 -o USF_TR
```

Best solution for large problem:

a f90 user function is much faster than MATC coding in the sif!

To be tested against LUA!

Step 2a: MaskCavity user function

```
FUNCTION MaskCavity ( Model, nodenumber, Input) RESULT(Mask)
  USE types
  USE CoordinateSystems
  USE SolverUtils
  USE ElementDescription
  USE DefUtils
  IMPLICIT NONE
  TYPE(Model_t) :: Model
  TYPE(Solver_t), TARGET :: Solver
  INTEGER :: nodenumber
  REAL(KIND=dp) :: Input(2), Mask
  REAL(KIND=dp) :: znode, zbed


  znode = Input(1)
  zbed = Input(2)

  IF (znode > zbed+0.1) THEN
    Mask = -1.0
  ELSE
    Mask = 1.0
  END IF
END FUNCTION MaskCavity
```


Observed crevasses one year after 1st drainage



circular crevasses observed in August 2011

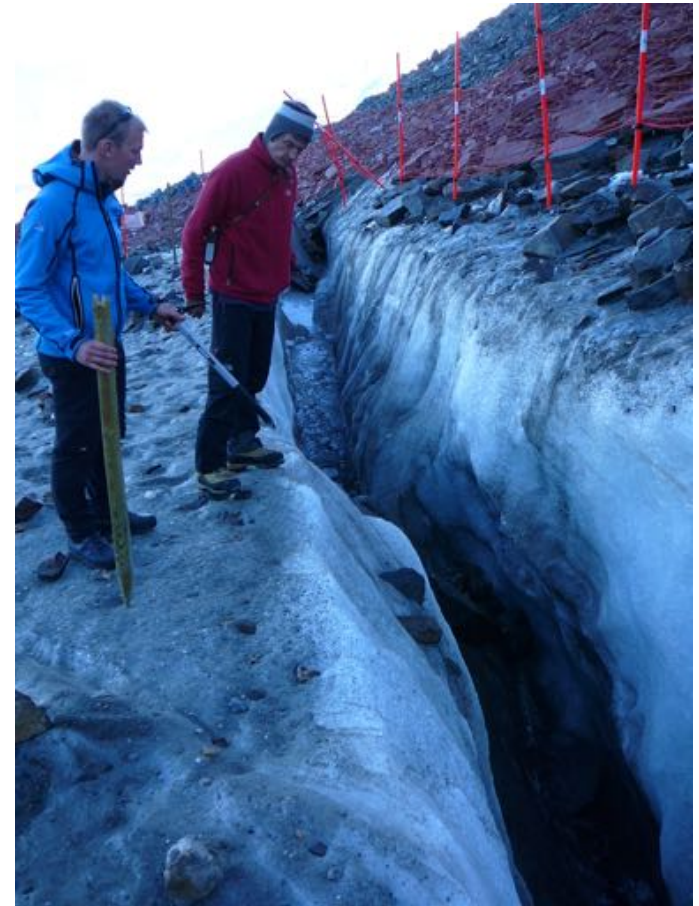

Evolution of the cavity geometry



Break off of part of the cavity roof after the 2012 artificial drainage.

Modelling Tête Rousse Glacier


- ✓ **Step 1** - Tête Rousse Glacier flow without a water filled-cavity (diagnostic)

- ✓ **Step 2**
 - 2a Influence of an empty cavity below Tête Rousse Glacier (diagnostic)
 - 2b Apply a water pressure in the cavity

- ✓ **Step 3**
 - 3a Rate of closure of the cavity for a given drainage scenario (prognostic)
 - 3b Add a drainage scenario

Step 2b: Add a water pressure

Modify the SIF to add a water pressure

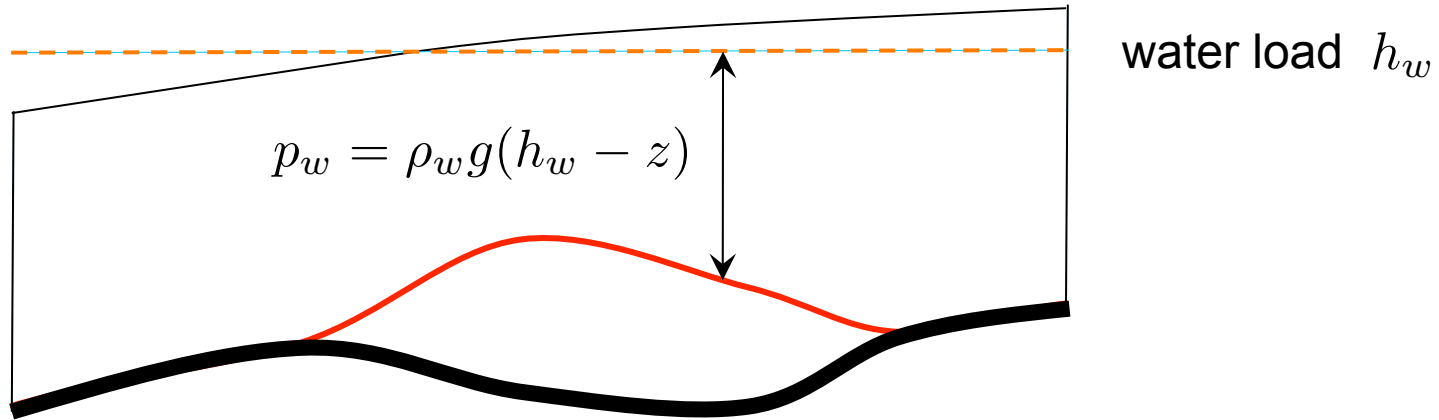

#hw = 3176.0

the water load

In the bedrock BC

```
External Pressure = Variable Coordinate 3  
Real LUA "rhow*gravity*(hw-tx[0])
```

will only apply where a
Dirichlet BC is not applied
i.e. in the cavity

Modelling Tête Rouse Glacier

✓ **Step 1** - Tête Rouse Glacier flow without a water filled-cavity (diagnostic)

✓ **Step 2**

- 2a Influence of an empty cavity below Tête Rouse Glacier (diagnostic)
- 2b Apply a water pressure in the cavity

✓ **Step 3**

- 3a Rate of closure of the cavity for a given drainage scenario (prognostic)
- 3b Add a drainage scenario

Step 3a: Move to prognostic

Will do it in two steps

- Move to prognostic assuming the cavity is empty of water at $t=0$
(big step, needs 2 new solvers!)
- Prescribe the observed drainage scenario for the water pressure

To move from a diagnostic to a prognostic simulations:

- Add the FreeSurface solver (here 2 times, since we have 2 FS)
- Add one body per FS (new Initial Condition and Equation Sections)
- Modifications in the Simulation and Boundary Condition Sections

Only shown for the upper free surface here

Step 3a – Steady to transient

The simulation Section has to be modified:

```
Simulation Type = Transient
```

```
Timestepping Method = "bdf" → Backward Differences Formulae  
BDF Order = 1
```

```
Output Intervals = 1
```

```
Timestep Intervals = 50
```

```
Timestep Sizes = #10.0/365.25
```

```
Steady State Min Iterations = 1 → To control the "implicit" of the solution  
Steady State Max Iterations = 1 over one time step (here 1 means  
explicit)
```

```
Restart File = "../..//Step2a/teterousse/teterousse_Step2a_.result"
```

```
Restart Position = 0
```

```
Restart Time = Real 0.0
```

```
Restart Before Initial Conditions = Logical True
```


→ We need a restart to have the ZsDEM and ZbDEM variables for the initial condition of Zs and Zb

Step 3a – Sketch of a transient simulation

Geometry + Mesh



Degrees of freedom

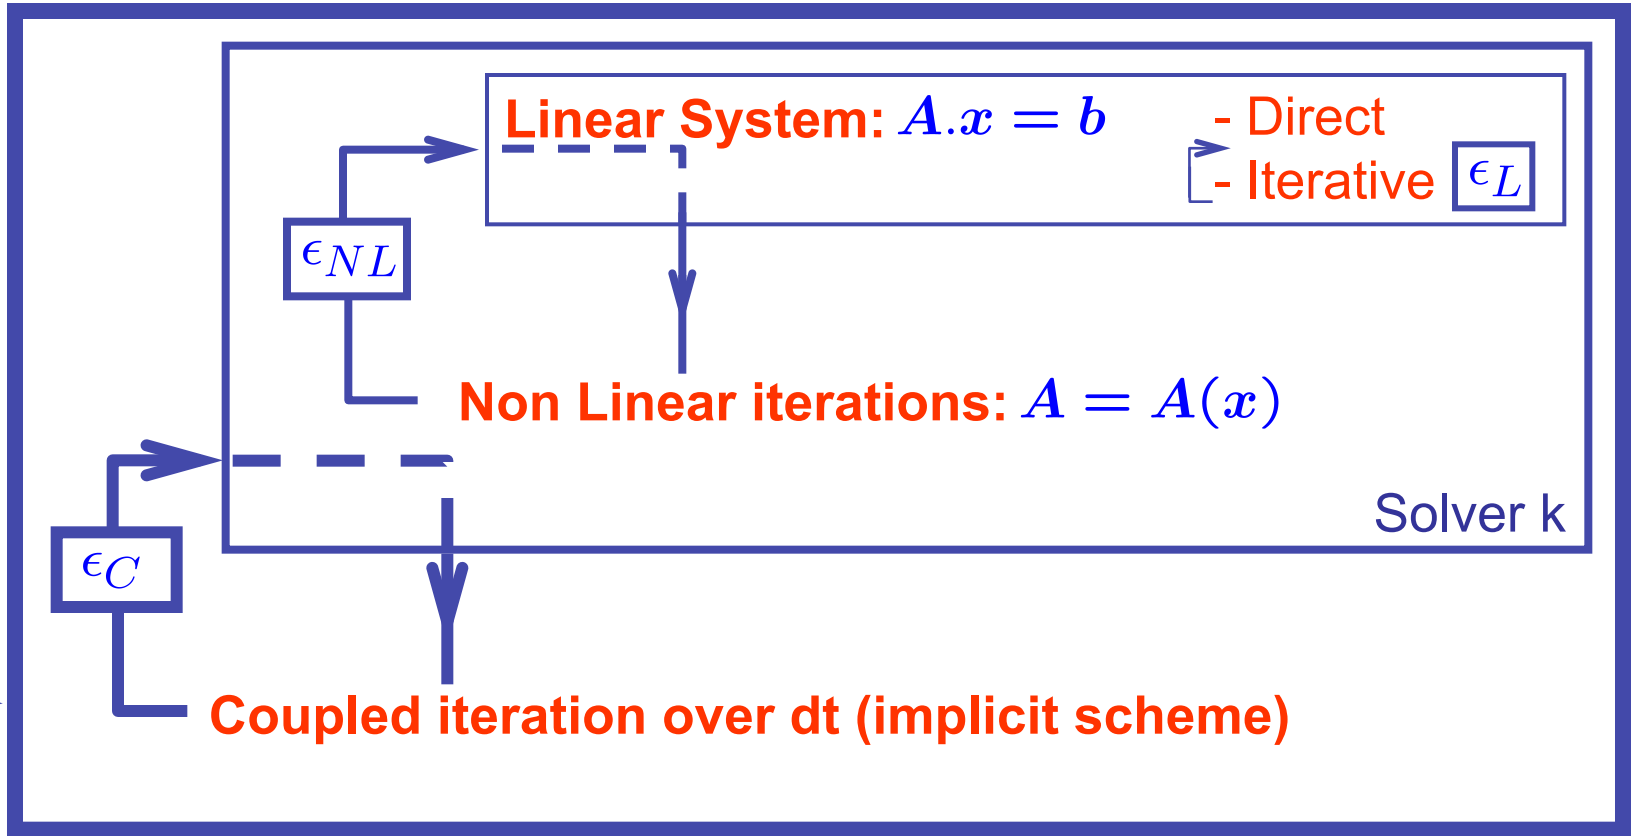

$$t = t + dt$$

$$\epsilon_L < \epsilon_{NL} < \epsilon_C$$

Step 3a – Free surface Solver

The free surface solver only apply to the boundary 3 (upper surface)

→ Define a 2nd body which is on boundary 3.

```
Body 2
  Equation = 2
  Body Force = 2
  Material = 1
  Initial Condition = 2
End
```

where Equation 2, Body Force 2 and Initial Condition 2 are defined for the free surface equation of the upper surface.

Tell in BC3 that this is the body 2:

```
Boundary Condition 3
  Body Id = 2
  ...
End
```

Step 3a – Add the Free surface Solver

```
Solver 6
Equation = "Free Surface Top"
Variable = String "Zs"
Variable DOFs = 1
Exported Variable 1 = String "Zs Residual"
Exported Variable 1 DOFs = 1

Procedure = "FreeSurfaceSolver" "FreeSurfaceSolver"
Before Linsolve = "EliminateDirichlet" "EliminateDirichlet"

Linear System Solver = Iterative
Linear System Max Iterations = 1500
Linear System Iterative Method = BiCGStab
Linear System Preconditioning = ILU0
Linear System Convergence Tolerance = Real 1.0e-9
Linear System Abort Not Converged = False
Linear System Residual Output = 1

Nonlinear System Max Iterations = 100
Nonlinear System Convergence Tolerance = 1.0e-6
Nonlinear System Relaxation Factor = 1.00

Steady State Convergence Tolerance = 1.0e-03

Stabilization Method = Bubbles
Apply Dirichlet = Logical False

! How much the free surface is relaxed
Relaxation Factor = Real 1.00
End
```

Step 3a – Upper Surface

Body Force 2:

```
Body Force 2
  Zs Accumulation Flux 1 = Real 0.0e0
  Zs Accumulation Flux 2 = Real 0.0e0
  Zs Accumulation Flux 3 = Real 0.0e0
End
```

Equation 2:

```
Equation 2
  Active Solvers(1) = 6
  Flow Solution Name = String "Flow Solution"
  Convection = String Computed
End
```

Initial Condition 2: (tell that $z_s(x, 0)$ is given by the surface DEM)

```
Initial Condition 2
  Zs = Equals ZsDEM
End
```

Step 3a - StructuredMeshMapper

We say in StructuredMeshMapper that the top (and bottom) surface is defined by the variable zs:

```
Solver 2
  Equation = "MapCoordinate"
  Procedure = "StructuredMeshMapper" "StructuredMeshMapper"

  Active Coordinate = Integer 3
  Mesh Velocity Variable = String "dSdt"
  Mesh Update Variable = String "dS"
  Mesh Velocity First Zero = Logical True

  Top Surface Variable Name = String "Zs"
  Bottom Surface Variable Name = String "Zb"

End
```

And delete from the BC the initial definition of the top (and bottom) surface:

```
Boundary Condition 3
!!! this BC is equal to body no. 2 !!!
  Body Id = 2
```

```
Top Surface = Equals ZsDEM
```

```
End
```

Step 3a – Same for the bedrock

Name of the variable: Zb

Add solver : Solver 7

Add equation: Equation 3

Modify the the Bottom surface BC (3):

Boundary Condition 2

Body Id = 3

~~Bottom Surface = Equals ZbDEM~~

End

Add a limiter to ensure that $z_b \geq b$

In the material section

Min Zb = Equals BedDEM

Max Zb = Real +1.0e10

+ in the Free Surface solver : Apply Dirichlet = Logical True

Step 3a – Newton linearization

If you want to use Newton linearization for the non-linear iterations, don't forget to reset the conditions used to move from Picard to Newton at each time step, by adding:

```
Solver 3  
  Equation = "Navier-Stokes"  
  Nonlinear System Reset Newton = Logical True
```

```
End
```

Step 3a – Cavity volume


Add the SaveScalars (Elmer) and UpdateExport (Elmer/Ice) solvers to save the cavity volume at each time step in an ASCII file.

```
Body Force 3
  Cavity Height = Variable bedDEM, Zb
    Real LUA "tx[1]-tx[0]"
End
```

```
Solver 8
  Equation = "UpdateExport"
  Procedure = File "ELmerIceSolvers" "UpdateExport"
  Variable = -nooutput "dummy"
```

```
  Exported Variable 1 = -dofs 1 "Cavity Height"
End
```

```
Solver 9
  Procedure = File "SaveData" "SaveScalars"
  Filename = "teterousse_Step".dat"
  File Append = Logical True
  Variable 1 = String "Time"
  Variable 2 = String "Cavity Height"
  Operator 2 = String "int"
End
```

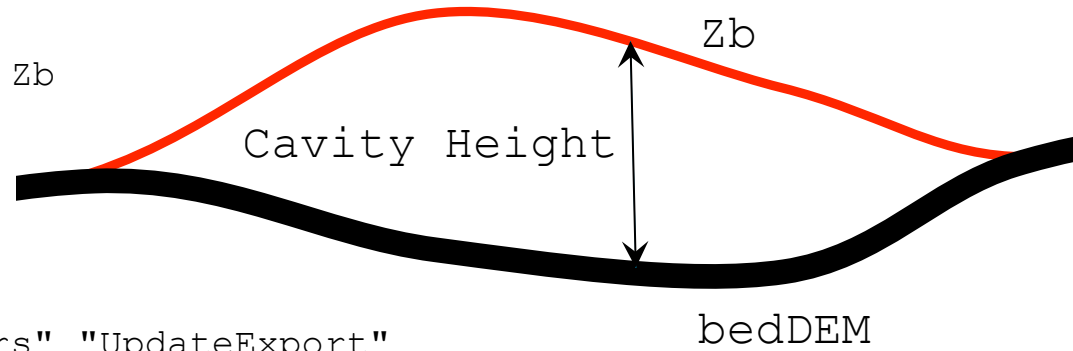

create a variable containing the cavity height

Step 3a – Two subtleties...

1/ Need of the restart...

Initial conditions are set before the first solver is executed
Impossible then to initialize with an other variable
This is then done by using a restart and specifying:

```
Restart Before Initial Conditions = Logical True
```

2/ Problem when a solver is called two time in the same sif...

Need to make a copy of the object file to avoid mixing of the saved variables in the solver from two different calls:

```
cp $ELMER_HOME/share/elmersolver/lib/FreeSurfaceSolver.so  
MyFreeSurfaceSolver
```

Use a different call in the sif file for Zb:

```
Procedure = "./MyFreeSurfaceSolver" "FreeSurfaceSolver"
```


Modelling Tête Rousse Glacier

✓ **Step 1** - Tête Rousse Glacier flow without a water filled-cavity (diagnostic)

✓ **Step 2**

- 2a Influence of an empty cavity below Tête Rousse Glacier (diagnostic)
- 2b Apply a water pressure in the cavity

✓ **Step 3**

- 3a Rate of closure of the cavity for a given drainage scenario (prognostic)
- 3b Add a drainage scenario

Step 3b – Add a drainage scenario

Add an evolution of the water load of the linear form:

$$h_w = 3170.0 - t * \Delta h_w / \Delta t$$

Work to do:

- write a MATC function `hw` to prescribe the water load evolution
- write a User Function to do the same (see `USF_TR.f90`)

Step 3b – Add a drainage scenario

LUA function h_w to prescribe the water load evolution:

```
! Water load function of time (in year)
! Decrease by DH in DT and  $h > 3100.0$ 
---LUA BEGIN
function hw(t)
  DH = 70.0
  DT = 20.0
  h = 3170.0 - t*365.25*DH/DT
  if (h > 3100.0) then return h else return 3100.0 end
end
---LUA END
```

Call in the bedrock BC

```
External Pressure = Variable time, Coordinate 3
Real LUA "rho*gravity*(hw(tx[0])-tx[1])"
```

Go parallel

This test should work in parallel as it is.

What is needed is just a partitioned mesh (here 2 partitions):

```
> ElmerGrid 14 2 teterousse0.msh -autoclean -metis 2 4
```

create a file `ELMERSOLVER_STARTINFO` which contains the name of the sif file on its first line,

and then

```
> mpirun -np 2 ElmerSolver
```

References

Gagliardini O., F. Gillet-Chaulet, G. Durand, C. Vincent and P. Duval, 2011. Estimating the risk of glacier cavity collapse during artificial drainage: the case of Tête Rousse Glacier. *Geophys. Res. Lett.*, 38, L10505, doi:10.1029/2011GL047536.